



IATF 16949:2016

MARINE LIGHTING

MANUFACTURER OF MARINE LIGHTS
HARDWARE AND ACCESSORIES



UNDERWATER LIGHT

NAVIGATION LIGHT

COURTESY LIGHT

SEARCH LIGHT

ALL-ROUND LIGHT

Foshan Xingyuan Auto Accessories Co.,Ltd

LED Ceiling Light


IP66

Wattage: 1W.

Working Voltage: 12 VDC

Flush mount

LED Power: 6×0.2W

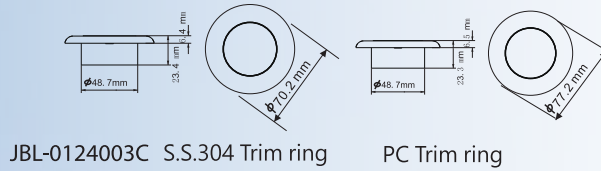

JBL-0124003C S.S.304 Trim ring

PC Trim ring



JBL-0124004



JBL-0124001C



JBL-0124005

Model No.	Color Temperature	Material
JBL-0124001C	Cool White(5500-6300K)	PC White
JBL-0124001	Warm White(2900-3000K)	PC White
JBL-0124002	Blue	PC White
JBL-0124003C	Cool White(5500-6300K)	PC+S.S.304
JBL-0124003	Warm White(2900-3000K)	PC+S.S.304
JBL-0124004	Blue	PC+S.S.304
JBL-0124005	Red	PC+S.S.304

LED Ceiling Light


IP67

Wattage: 1W.

Voltage: 12VDC.

Surface mount.

LED Power: 6×0.2W



JBL-0124007



JBL-0124008

Model No.	Color Temperature	Material
JBL-0124007	Cool White(5500-6300K)	PC+S.S.304
JBL-0124008	Blue	PC+S.S.304
JBL-0124009	Warm white	PC+S.S.304

LED Ceiling Light


IP66

Wattage: 0.5W.


Working Voltage: 12 VDC

Flush mount

LED Power: 3×0.2W



S.S.304 Trim ring



PC Trim ring



JBL-0124010



JBL-0124011


Model No.	Color Temperature	Material
JBL-0124010	Cool White(5500-6300K)	PC
JBL-0124011	Blue	PC
JBL-0124012	Cool White(5500-6300K)	PC+S.S.304
JBL-0124013	Blue	PC+S.S.304

LED Ceiling Light 12VDC

Wattage: 3.6 W.

Mount Type: Surface mount

LED "2835":20×0.2W



Model No.	Color Temperature	Diameter	Material	Voltage
JBL-0124014	White (5500-6300K)	106.6mm(4-1/6")	Brass	12V
JBL-0124015	White (5500-6300K)	106.6mm(4-1/6")	S.S.304	12V
JBL-0124016	White (5500-6300K)	137mm/(5-3/8")	Brass	12V
JBL-0124017	White (5500-6300K)	137mm/(5-3/8")	S.S.304	12V
JBL-0124017-WR	Red/White (5500-6300K)	137mm/(5-3/8")	S.S.304	12V
JBL-0124018	White (5500-6300K)	168mm/(6-5/8")	Brass	12V
JBL-0124019	White (5500-6300K)	168mm/(6-5/8")	S.S.304	12V
JBL-0124019-24V	White (5500-6300K)	168mm/(6-5/8")	S.S.304	24V



Stainless Steel

Brass

LED Ceiling Light

Wattage: 4.4 W.

Working Voltage: 12 VDC

Mount Type: Surface mount

LED "2835":24 pcs



Model No.	Color Temperature	Diameter
JBL-0124020	White (5500-6300K)	125mm/5 "




LED Ceiling Light

Wattage: 5inch 6W, 4inch 4W

Working Voltage: 10-30VDC

Mount Type: Surface mount

With blue night light switch

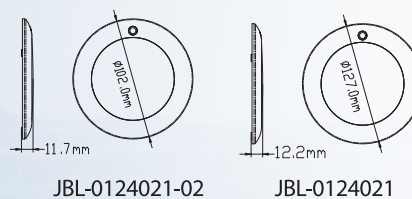


Model No.	Color Temperature	Diameter
JBL-0124021	Warm White (2900-3200K)	127mm/5"
JBL-0124021-C	Cool White (5800-6300K)	127mm/5"
JBL-0124021-02	Warm White (2900-3200K)	102mm/4"
JBL-0124021-02C	Cool White (5800-6300K)	102mm/4 "



LED Ceiling Light 12VDC


Wattage: 2.2W
Working Voltage: 12VDC
Mount Type: Surface mount



Model No.	Color Temperature	Material
JBL-0124022	Warm White (2900-3200K)	PC

LED Ceiling Light

Wattage: 3W
Working Voltage: 8-30 VDC
Mount Type: Flush spring mount




Model No.	Color Temperature	Material
JBL-0124023	RGBW (White 5500-6300K) Red, Green, Blue, White	Stainless Steel



LED Ceiling Light

Wattage: 3W
Working Voltage: 8-30 VDC
Mount Type: Flush spring mount



Model No.	Color Temperature	Material
JBL-0124024	Warm White (2800-3000K)	Stainless Steel

LED Oblong Courtesy Light

IP67
Wattage: 0.5W
LED power: 3x0.2W
Flush mount
Material: S.S. 316 and PC base.


Model No.	Color	Voltage
JBL-0224001-CWH	Cool White(5500-6300K)	12VDC
JBL-0224001-WH	Warm White(2900-3200K)	12VDC
JBL-0224001-BU	Blue	12VDC
JBL-0224001-CWH24	Cool White(5500-6300K)	24VDC
JBL-0224001-WH24	Warm White(2900-3200K)	24VDC
JBL-0224001-BU24	Blue	24VDC
JBL-0224001-CWHK	Cool white(5500-6300K)	12-24VDC
JBL-0224001-WHK	Warm white(2900-3200K)	12-24VDC
JBL-0224001-BUK	Blue	12-24VDC



JBL-0224001-CWH JBL-0224001-WH



JBL-0224001-BU



LED Oblong Courtesy Light

IP67
Wattage: 0.5W.
Voltage: 12VDC.
Flush mount.
Material: Plastic


Model No.	Material	Color Temperature	LED Power
JBL-0224001-CWHW	PC White	Cool White(5500-6300K)	3x0.2W
JBL-0224001-WHW	PC White	Warm White(2900-3200K)	3x0.2W
JBL-0224001-BUW	PC White	Blue	3x0.2W
JBL-0224001-CWHB	PC Black	Cool White(5500-6300K)	3x0.2W
JBL-0224001-WHB	PC Black	Warm White(2900-3200K)	3x0.2W
JBL-0224001-BUB	PC Black	Blue	3x0.2W



JBL-0224001-CWHW



JBL-0224001-WHB




LED Courtesy Light

IP67
Wattage: 1.2W
Mount Type: Surface mount
Material: S.S. 304

Model No.	Voltage	Color Temperature	LED Power
JBL-0224002	12VDC	Cool White(5500-6300K)	6x0.2W
JBL-0224003	12VDC	Blue	6x0.2W
JBL-0224002-24	24VDC	Cool White(5500-6300K)	6x0.2W
JBL-0224003-24	24VDC	Blue	6x0.2W



JBL-0224002 JBL-0224003



LED Courtesy Light

IP65

Working Voltage: 12 VDC

Mount Type: Surface mount


Material: PC

Model No.	Color Temperature	LED Power
JBL-0224004	Warm White(2900-3200K)	5×0.5W
JBL-0224005	Blue	5×0.5W



JBL-0224004

JBL-0224005



LED License/courtesy Light

IP67

Wattage: 0.6W.

Voltage: 12VDC.

Surface mount.


Material:PC.

Model No.	Color Temperature	Lens Type
JBL-0224006-WH	Cool White(5500-6300K)	Clear
JBL-0224007-WH	Cool White(5500-6300K)	White
JBL-0224008-WH	Blue	White
JBL-0224006-BK	Cool White(5500-6300K)	Clear
JBL-0224007-BK	Cool White(5500-6300K)	White
JBL-0224008-BK	Blue	White



JBL-0224007-WH

JBL-0224007-BK



LED Courtesy Light

IP67

Wattage: 0.4W.

Voltage: 12VDC.


Surface mount.

Material:PC+Stainless Steel.

Model No.	Color & Color Temperature	LED Power
JBL-0224009-WH	Cool White(5500-6300K)	4×0.2W
JBL-0224010-WWH	Warm White(2800-3200K)	4×0.2W



JBL-0224009-WH




LED Courtesy Light

Wattage: 0.2 W.

Working Voltage: 12 VDC

Mount Type: Flush mount

Model No.	Color Temperature	LED Power
JBL-0224011	Cool White(5500-6300K)	1×0.2W
JBL-0224011-02	Warm White(2800-3200K)	1×0.2W
JBL-0224011-BU	Blue	1×0.2W
JBL-0224011-M	Multi-Color	4×0.2W



JBL-0224011

JBL-0224011-02



JBL-0224011-BU

JBL-0224011-M

LED Courtesy Light

IP66

Working Voltage: 12 VDC

Mount Type: Flush mount

Material: Stainless Steel

Lumen:28

Mount hole 2inch (51mm)

Diameter:3inch (76mm)

Model No.	Color Temperature	LED Power
JBL-0224012	Cool White(5500-6300)	0.5W



JBL-0224012

LED Livewell Light 12VDC

IP68

Wattage: 0.2W.

Voltage : 12VDC.

Flush mount.

Material: PC



Model No.	Color Temperature	LED Power
JBL-0224013	Cool White(5500-6300K)	1×0.2W
JBL-0224014	Blue	1×0.2W
JBL-0224015	Cool White(5500-6300K)	1×0.2W
JBL-0224016	Blue	1×0.2W



JBL-0224013



JBL-0224015



Wattage:9.8W

Working Voltage:DC10-30V

Surface mount.


Material: PC

Housing Colour : White

Model No.	Color Temperature	LED Power
JBL-0224017	Cool White(5500-6300K)	33x0.5w



JBL-0224017



LED Underwater Fishing Light 10–30VDC

IP68

Effective wattage:24W/45W

Material: PC & Aluminum.

These super bright LED lights that is your best choice to attract prawns, squids and fish.

These underwater LED lights can penetrate up to 5m

Model No.	Color & Color Temperature	LED Power
JBL-0324101-WH	White (5500-6300 K)	60×0.5 W
JBL-0324101-GH	Green	60×0.5 W
JBL-0324101-BU	Blue	60×0.5 W
JBL-0324102-WH	White (5500-6300 K)	123×0.5 W
JBL-0324102-GH	Green	123×0.5 W
JBL-0324102-BU	Blue	123×0.5 W



LED Underwater Fishing Light 10–30VDC

IP68

Effective wattage:45W

Applied wide range voltage 10-30V.

Brighter than a 400 watt halogen light with only 45w power consumption.

Saving 70% electricity than the conventional light.

Hexagon hollow aluminum tube is used to lower the temperature rapidly and will prolong the life of the LED.

Double-layer waterproof design for better performance.

Material: PC & Aluminum

Model No.	Color & Color Temperature	LED Power
JBL-0324103-WH	White (5500-6300 K)	144×0.5 W
JBL-0324103-GH	Green	144×0.5 W
JBL-0324103-BU	Blue	144×0.5 W



NC008-WH

NC008-GN



NC008-BU

Underwater Light

LED Underwater Light 10-30VDC



IP68

Working Voltage: 10-30 VDC

Cover Material: S.S.316 polished

Mount Type: Surface mount

Diameter: 3"-2 3/4" (92.8mm)

High quality S.S.316 under water light are designed to be internal driver, easy to installed on the boat surface.


Model No.	Color	LED Power
JBL-0324104	White	6×3W
JBL-0324105	Blue	6×3W




JBL-0324104



JBL-0324105



LED Muti-color Underwater Light 12-24VDC

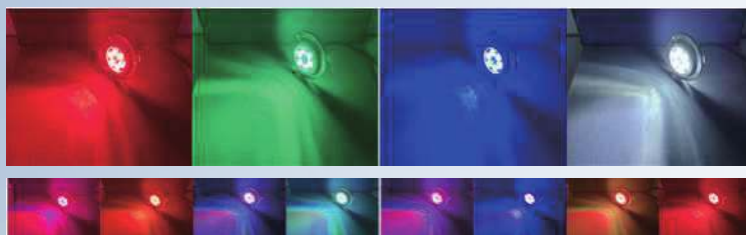

IP68

Working Voltage: 12-24 VDC

Cover Material: S.S.316 polished

RF remote control (433 MHz)/ switch control

RGBW+7 Muti-colors 4 modes


* The master controller can connect up to 3 lights.

* The vice controller use for more than 3 lights in a boat.

Model No.	Color	LED Power
JBL-0324106B	Muti-Color	6pcs x 3W RGBW LED
JBL-0324106B-C	Master Controller with Remote controller, 3 wire connectors	
JBL-0324106-C1	Vice Controller	



JBL-0324106B-C



LED Underwater Light

S.S.316



Water Proof Level: IP68

Working Voltage: 10-30 VDC

Cover Material: S.S.316 polished

Material: Stainless Steel 316

Mount Type: Surface mount

Viewing Angle : 90°

Patent No. 2017306406244, 201721747478.6

High quality S.S.316 under water light are designed to be internal driver, easy to installed on the boat surface.


Model No.	Color	LED Power	Overall Length
JBL-0324107-1	Cool White	27X0.2W	3-5/6''(95.5mm)
JBL-0324107-W2	Warm White	27X0.2W	3-5/6''(95.5mm)
JBL-0324108-1	Blue	27X0.2W	3-5/6''(95.5mm)
JBL-0324108-RD	Red	27X0.2W	3-5/6''(95.5mm)
JBL-0324109	Green	27X0.2W	3-5/6''(95.5mm)
JBL-0324108-WB	White+Blue	24X0.2W*2	3-5/6''(95.5mm)
JBL-03241010	Cool White	39X0.2W	4-3/4''(120mm)
JBL-03241011	Blue	39X0.2W	4-3/4''(120mm)
JBL-03241011-WB	White+Blue	33X0.2W*2	4-3/4''(120mm)




JBL-0324107-1



JBL-03241011



JBL-03241011



JBL-0324107-1


LED Underwater Light



Working Voltage: 12 VDC

Water Proof Level: IP68

Mount Type: Surface mount

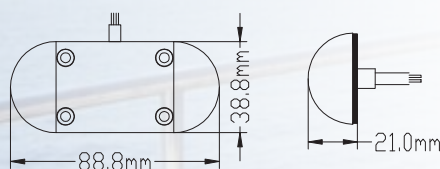

Model No.	Color	LED Power
JBL-03241012-WH	Warm White	6×0.2W
JBL-03241012-BU	Blue	6×0.2W

Underwater Light

LED Trim Tab Trasom Underwater Light Bar 12-24VDC



Water Proof Level: IP68

Mount Type: Surface mount

High quality under water light are designed to be internal driver, easy to installed on the boat surface.

Model No.	Color	LED Power
JBL-03241013	One pair white	21×0.2W
JBL-03241014	One pair blue	21×0.2W



LED Plug Drain Underwater Light




JBL-03241015

JBL-03241017


Water Proof Level: IP68

Material: Brass

Model No.	Color	LED Power	Voltage
JBL-03241015	White	2×0.2W	12VDC
JBL-03241016	Blue	2×0.2W	12VDC
JBL-03241017	White	1×7W	10-30VDC
JBL-03241018	Blue	1×7W	10-30VDC

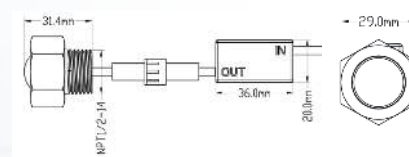

JBL-03241017



JBL-03241015

LED Underwater Light 10–30VDC



High quality underwater light are designed to be internal driver,
easy to installed on the boat surface.

Extremely bright.

Working Voltage: 10-30 VDC.

Water Proof Level: IP68.


Model No.	Color	LED Power	Cover Material
JBL-03241019	White	3×3W	PC
JBL-03241020	Blue	3×3W	PC
JBL-03241021	White	6×3W	PC
JBL-03241021S	White	6×3W	S.S.316
JBL-03241022	Blue	6×3W	PC
JBL-03241022S	Blue	6×3W	S.S.316





JBL-03241021




JBL-03241021S



JBL-03241021



JBL-03241021S



LED Underwater Light 10–30VDC



JBL-03241025

JBL-03241025S

JBL-03241027

JBL-03241027S

JBL-03241029

JBL-03241029S

Extremely bright.

Working Voltage: 10-30 VDC.



Water Proof Level: IP68.

High quality under water light are designed to be internal driver,
easy to installed on the boat surface.


Model No.	Color	LED Power	Cover Material
JBL-03241023	White	3×3W	PC
JBL-03241024	Blue	3×3W	PC
JBL-03241025	White	6×3W	PC
JBL-03241025S	White	6×3W	S.S.316
JBL-03241026	Blue	6×3W	PC
JBL-03241026S	Blue	6×3W	S.S.316
JBL-03241027	White	9×3W	PC
JBL-03241027S	White	9×3W	S.S.316
JBL-03241028	Blue	9×3W	PC
JBL-03241028S	Blue	9×3W	S.S.316
JBL-03241029	White	12×3W	PC
JBL-03241029S	White	12×3W	S.S.316
JBL-03241030	Blue	12×3W	PC
JBL-03241030S	Blue	12×3W	S.S.316




JBL-03241025



JBL-03241027



JBL-03241029




LED Navigation Light 12VDC



Wattage: 0.9W.
Voltage: DC 12V.
Material: Plastic.
Vertical mount.
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Housing color	Visibility
JBL-0424001-WHLD	Green Starboard light	112.5°	White	1NM
JBL-0424001-LD	Green Starboard light	112.5°	Black	1NM
JBL-0424002-WHLD	Red Port light	112.5°	White	1NM
JBL-0424002-LD	Red Port light	112.5°	Black	1NM
JBL-0424003-WHLD	White Masthead light	225°	White	2NM
JBL-0424003-LD	White Masthead light	225°	Black	2NM
JBL-0424004-WHLD	White Stern light	135°	White	2NM
JBL-0424004-LD	White Stern light	135°	Black	2NM
JBL-0424005-WHLD	Bi-Color bow light	225°	White	1NM
JBL-0424005-LD	Bi-Color bow light	225°	Black	1NM




LED Navigation Light 12VDC



Wattage: 1W
Voltage: DC 12V.
Material: Plastic and S.S.304.
LED with colored lens and black housing.
*DC24V LED lights available.
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Visibility
JBL-0424006-LD	Green Starboard light	112.5°	1NM
JBL-0424007-LD	Red Port light	112.5°	1NM
JBL-0424008-LD	White Masthead light	225°	2MN
JBL-0424009-LD	White Stern light	135°	2NM
JBL-0424010-LD	Bi-Color bow light	225°	1NM

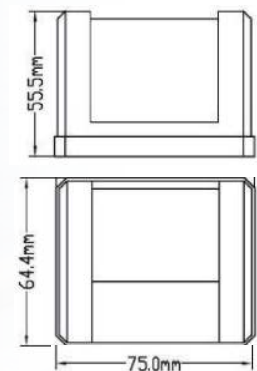


LED Navigation Light 10–30VDC



IP 66.
Bi-color light 3.4W.
Wattage: Sidelight 1.7W.
Voltage: DC 10–30V.
Material: Stainless Steel
Horizontal mount. Red and Green LED in clear lenses.
For use on boats up to 65.6 ft (20m).

Model No.	Type	Angle	Visibility
JBL-0424011	Green Starboard light Red Port light	112.5° 112.5°	2NM 2NM
JBL-0424012	White Masthead light	225°	2NM
JBL-0424013	White Stern light	135°	2NM
JBL-0424014	Bi-Color Bow light	225°	2NM




LED Navigation Light 12VDC




IP 66
Bi-color light 3W
Wattage: Sidelight 1.5W.
Voltage: DC 12V
Material: Stainless Steel
Horizontal mount. Red and green led in clear lenses
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Visibility
JBL-0424015	Green Starboard light Red Port light	112.5° 112.5°	1NM 1NM
JBL-0424016	Bi-Color Bow light	225°	1NM

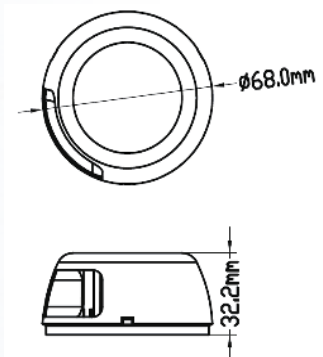

LED Navigation Light 12VDC

For use on boats up to 39.4 ft (12m)
 Bi-color light 2.2W.
 Wattage: Sidelight 1.5W.
 Voltage: DC 12V.
 Material: S.S. 316 and PC base.
 Horizontal mount.



Model No.	Type	Angle	Visibility
JBL-0424017	Green Starboard light Red Port light	112.5° 112.5°	1NM 1NM
JBL-0424018	White Stern Light	135°	2NM
JBL-0424019	Bi-Color Bow light	225°	1NM



JBL-0424017




JBL-0424019

JBL-0424018

LED Navigation Light

IP 66
 For use on boats up to 39.4 ft (12m).
 Wattage: 1W
 Voltage: DC 10-30V
 Material: Stainless Steel 304
 Horizontal Surface mount.




Model No.	Type	Angle	Visibility
JBL-0424020	Green Starboard light Red Port light	112.5° 112.5°	1NM 1NM
JBL-0424021	Bi-Color Bow light	225°	1NM



JBL-0424020

LED Navigation Light

IP 66
 Wattage: E011026:1W*2 E011027:2W
 Voltage: 12VDC.
 Visibility 2NM
 Horizontal mount.
 For use on boats up to 65.6 ft (20m).



Model No.	Type	Angle	Material
JBL-0424022	Green Starboard light, Red Port light	112.5°	Plastic
JBL-0424022-SS	Green Starboard light, Red Port light	112.5°	SS316
JBL-0424023	Bi-Color Bow light	225°	Plastic
JBL-0424023-SS	Bi-Color Bow light	225°	SS316



JBL-0424022-SS

JBL-0424022




JBL-0424023-SS

LED Navigation Light 12VDC

S.S.316

IP 66
Angle:112.5°
Wattage: 1W
Voltage: DC 12V.
Material: Stainless Steel 316
For use on boats up to 39.4 ft (12m).




JBL-0424024-SS

Model No.	Type	Visibility
JBL-0424024-SS	Green Starboard light Red Port light	1NM 1NM

LED Navigation Light 12VDC

IP 66.
Angle:112.5°
Wattage: 0.8W
Material: Plastic
For use on boats up to 39.4 ft (12m).

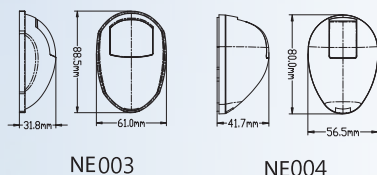

JBL-0424025




JBL-0424026

Model No.	Type	Visibility
JBL-0424025	Green Starboard light Red Port light	1NM 1NM
JBL-0424026	Green Starboard light Red Port light	1NM 1NM

LED Navigation Light 10-30VDC

USCG 2NM

IP 66.
Angle:112.5°
Wattage: 2W
Material: Plastic.
Vertical mount.
For use on boats up to 65.6 ft (20m).



JBL-0424029

Model No.	Type	Housing	Visibility
JBL-0424027	Green Starboard light Red Port light	White	2NM
JBL-0424028	Green Starboard light Red Port light	Black	2NM
JBL-0424029	Green Starboard light Red Port light	Plastic Plating Silver	2NM




JBL-0424027



JBL-0424028

LED Stern Light 12VDC

IP 66.
Angle:135°
For use on boats up to 65.6 ft (20m).
Wattage: 2.2W.
Voltage: 12VDC.
Material: S.S.304.




Model No.	Type	Lighting color	Visibility
JBL-0424030	Round Stern Light	Cool White	2NM
JBL-0424030W	Round Stern Light	Warm White	2NM
JBL-0424031	Round Stern Light	Bule	—

JBL-0424030



Navigation Light 12VDC

IP 65.
Angle:112.5°
Voltage: 12VDC.
Material: Plastic
For use on boats up to 39.4 ft (12m).

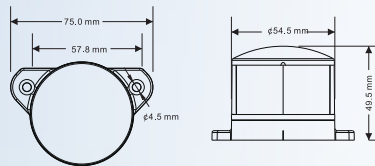


Model No.	Type	Wattage	Visibility
JBL-0424032 (Tungsten lamp)	Green Starboard light Red Port light	5W	1NM 1NM
JBL-0424032-LD (LED)	Green Starboard light Red Port light	1.5W	1NM 1NM



JBL-0424032-LD

LED Bi-color Bow Light

IP65
Angle:225°
For use on boats up to 39.4 ft (12m).

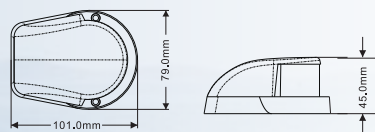



Model No.	Material	Voltage	watt	Visibility
JBL-0424033	Chrome-plated zinc	12VDC	0.7W	1NM
JBL-0424034	Stainless Steel	10-30VDC	2W	2NM



JBL-0424033

JBL-0424034

LED Bi-color Bow Light 12VDC

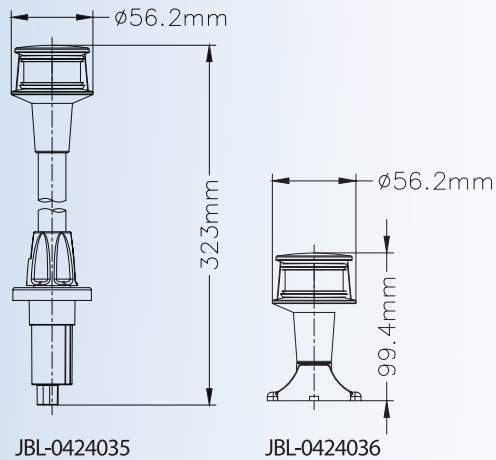

IP65

Visibility:1NM

For use on boats up to 39.4 ft (12m)

Wattage: 1.5 W.

Voltage:12 VDC.

Model No.	Base Type	Height
JBL-0424035	Plug-in mount	12" (306mm)
JBL-0424035-B2	Plug-in mount, w/ Straight base	12" (306mm)
JBL-0424036	Fixed mount	4" (99mm)
JBL-04240-36-WH	Fixed mount	4" (99mm)



JBL-0424035



JBL-0424035-B2




JBL-0424036



JBL-04240-36-WH

LED Bi-color Bow Light 12VDC



IP66

Visibility:1NM

For use on boats up to 39.4 ft (12m).

Wattage: 2 W.

Voltage:12 VDC.

Material: Plastic+Stainless Steel

Model No.	Base Type	Height
JBL-0424037	Plug-in mount	without work light
JBL-0424037-B3	Plug-in mount, w/ SS Straight base	without work light
JBL-0424038	Plug-in mount	with work light
JBL-0424038-B3	Plug-in mount w/ SS Straight base	with work light



JBL-0424037



JBL-0424038


LED Tri-color Bow Light 12VDC

Visibility: 1NM
 Voltage : 12VDC
 Wattage : 1.5W*2
 LED Tri-Color Light use
 for boats up to 39.4 ft (12m).

Model No.	Visibility	Angle
JBL-0424039	1NM	Red+Green+White=360degree




JBL-0424039

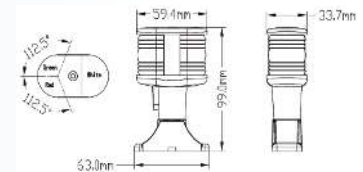

All-round And Masthead Light

Visibility: 2NM
 All-Round light use for boats up to 39.4 ft (12m).
 Stainless steel tube.
 Angle 225° /360°.

Model No.	Bulb Type	Height
JBL-0424040D	LED	4" (99mm)
JBL-0424040LD	LED	12"(293mm)
JBL-0424041D	LED	10"(259mm)

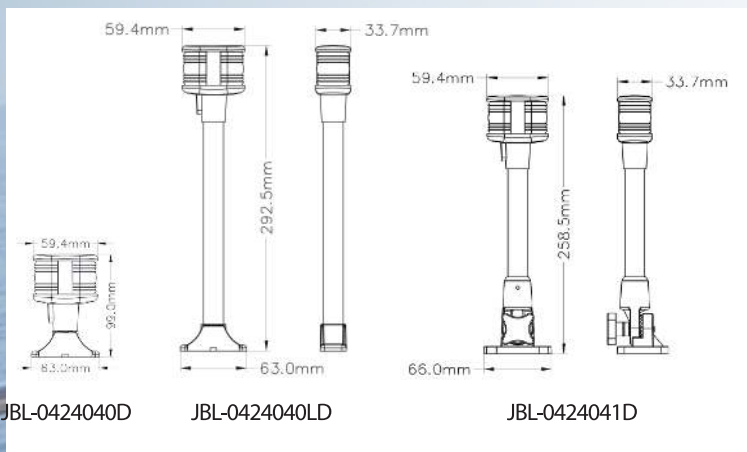

JBL-0424040D

JBL-0424040LD

JBL-0424041D



JBL-0424040D



JBL-0424040LD



JBL-0424041D

LED All Round Light 10-30VDC

USCG 2NM


IP67

For use on boats up to 164 ft (50m).

Wattage: 3 W.

Voltage: 10-30 VDC.

Material: Plastic

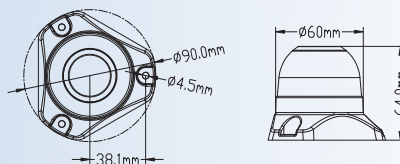

Model No.	Lighting Color	Certificate
JBL-0424042	White 360 °	USCG 3NM
JBL-0424042-GN	Green 360 °	USCG 2NM
JBL-0424042-RD	Red 360°	USCG 2NM



JBL-0424042



JBL-0424042-RD



JBL-0424042-GN

LED All Round Light 8-30VDC

IP67.


Visibility: 3NM

LED All-Round Light use for boats up to 65.6 ft (20m).

Wattage: 3W.

Voltage: 8-30 VDC.

Material: Plastic+Aluminum pole.



NE201-8A

NE201-12A

Model No.	Base Type	Overall Length
JBL-0424043-8A	Adjustable base	8" (203mm)
JBL-0424043-12A	Adjustable base	12" (305mm)



JBL-0424043-12A



JBL-0424043-8A

LED All-round Light 12VDC

Model No.	Base Type	Overall Length	
JBL-0424044-4	Fixed mount	2.8" (70mm)	IP65 Visibility: 2NM Wattage: 1.5 W. Voltage: 12 VDC. Material: Plastic+Stainless Steel Color Temperature: Daylight white 4000-4500K LED All-Round Light use for boats up to 65.6 ft (20m).
JBL-0424044-7	Fixed mount	6" (150mm)	
JBL-0424045-9	Adjustable mount	8" (205mm)	
JBL-0424045-25	Adjustable mount	23.6" (600mm)	
JBL-0424048	Adjustable mount	14.2" (360mm)	
JBL-0424049-24	Plug-in mount	22" (557mm)	

SERIES 84

USCG 2NM



JBL-0424044-4


JBL-0424044-7

JBL-0424045-9

JBL-0424045-25

JBL-0424048

JBL-0424049-24

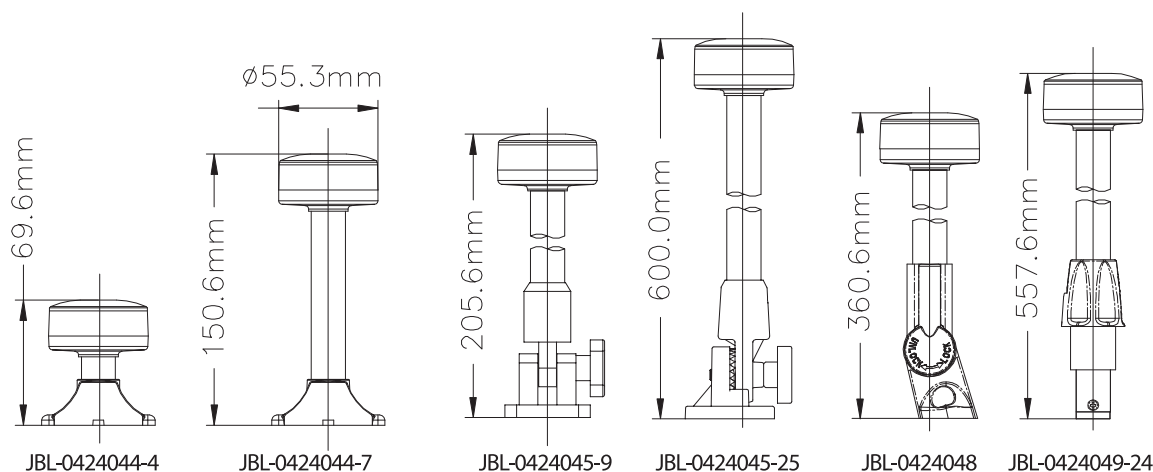

JBL-0424044-4

JBL-0424044-7

JBL-0424045-9

JBL-0424045-25

JBL-0424048

JBL-0424049-24

LED All-round Light 12VDC

Model No.	Base Type	Overall Length	
JBL-0424050-4	Fixed mount	4" (106mm)	IP65 Visibility: 2NM Wattage: 1.5 W. Voltage: 12 VDC. Material: Plastic+Stainless Steel Color Temperature: Daylight white 4000-4500K LED All-Round Light use for boats up to 65.6 ft (20m).
JBL-0424050-7	Fixed mount	7-1/2" (186mm)	
JBL-0424050-9N	Adjustable mount	9-1/4" (235mm)	
JBL-0424050-25N	Adjustable mount	25" (635mm)	
JBL-0424050-22A	Adjustable mount	21-1/2" (546mm)	
JBL-0424050-25A	Adjustable mount	25" (635mm)	
JBL-0424051-12A	Adjustable mount	12" (305mm)	
JBL-0424051-16	Adjustable mount	16" (396mm)	
JBL-0424051-16A	Adjustable mount	16" (396mm)	
JBL-0424052-24	Plug-in mount	24" (593mm)	
JBL-0424052-24B	Plug-in mount, w/Straight base	24" (593mm)	
JBL-0424052-36	Plug-in mount	36" (898mm)	
JBL-0424053	Plug-in mount	28-1/4"~44" (750-1110mm)	

SERIES 89

USCG 2NM




LED All-round Light 12-24VDC

Model No.	Base Type	Overall Length	
JBL-0424054	/	1-3/4" (71mm)	IP65 Visibility:3NM For use on boats up to 65.6 ft (20m). Wattage: 2.5 W. Material: Plastic+Stainless Steel Color Temperature: Daylight white 4000-4500K *12-24VDC Green or Red LED light available
JBL-0424055	Fixed mount	4-7/8" (124mm)	
JBL-0424055-WH	Fixed mount	4-7/8" (124mm)	
JBL-0424055-12	Fixed mount	12-1/2" (318mm)	
JBL-0424056-9	Adjustable mount	9-1/2" (248mm)	
JBL-0424056-25	Adjustable mount	25" (642mm)	
JBL-0424057-16	Adjustable mount	16" (403mm)	
JBL-0424058-24	Plug-in mount	24" (600mm)	
JBL-0424058-24B	Plug-in mount, w/ Straight base	24" (600mm)	
JBL-0424058-36	Plug-in mount	36" (905mm)	

SERIES 42

USCG 3NM

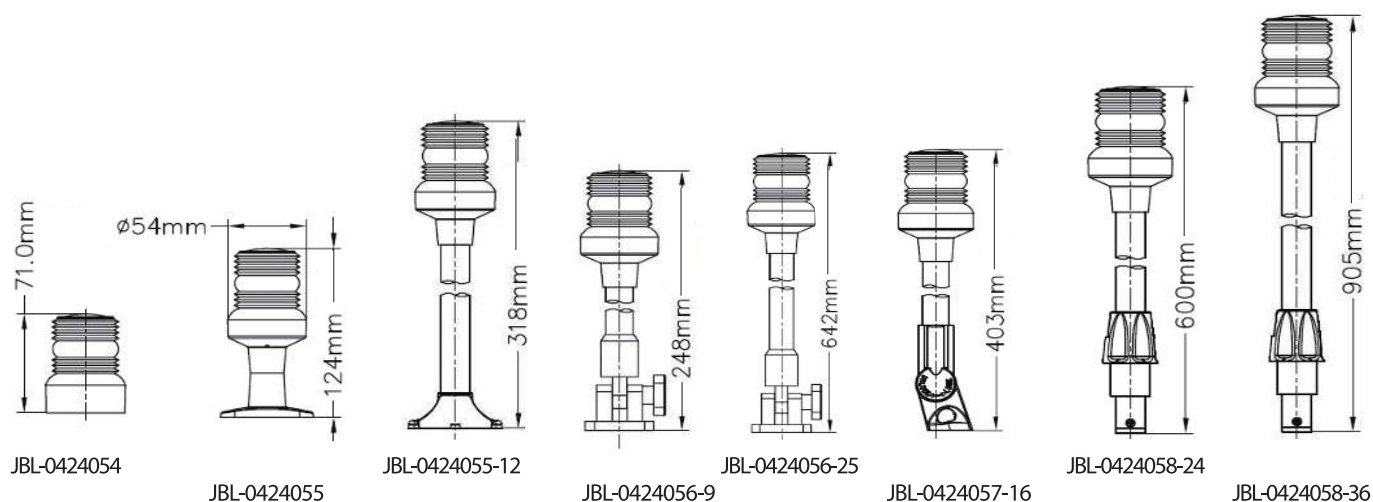

LED All-round Light 12-24VDC SERIES 62

Model No.	Base Type	Overall Length	
JBL-0424059-D	Fixed mount	4-3/8" (110mm)	IP65 Visibility: 2NM Wattage: 2.5 W. Material: Plastic + Stainless Steel. For use on boats up to 65.6 ft (20m).
JBL-0424059-DWH	Fixed mount	4-3/8" (110mm)	
JBL-0424060-D	Adjustable mount	9-5/8" (244mm)	
JBL-0424061-D12B	Plug-in mount W/straight base	13" (335mm)	

Straight Light Head



Angled Light Head

Model No.	Base Type	Overall Length
JBL-0424062	Adjustable mount	9-1/2" (248mm)
JBL-0424063	Adjustable mount	16" (403mm)
JBL-0424064-24WH	Plug-in mount	24" (600mm)
JBL-0424064	Plug-in mount	24" (600mm)
JBL-0424064B	Plug-in mount, w/Angled base	24" (600mm)
JBL-0424065 (Telescopic Aluminum Pole)	Plug-in mount	29-1/4"~43-3/4" (750-1110mm)



LED Anchor Light 12-24VDC

Model No.	Base Type	Overall Length	
JBL-0424066	Fixed mount	8" (198mm)	IP65 Visibility:2NM Wattage: 2.5 W Voltage:12-24 VDC
JBL-0424067	Adjustable mount	10" (252mm)	
JBL-0424068	Adjustable mount	16" (407mm)	
JBL-0424069	Plug-in mount	24" (604mm)	
JBL-0424069-24B	Plug-in mount,w/Angled base	24" (604mm)	
JBL-0424070 (Telescopic Aluminum Pole)	Plug-in mount	28-1/4"~44-3/4" (750-1110mm)	

SERIES 80

USCG 2NM



JBL-0424066


JBL-0424067

JBL-0424068

JBL-0424069

JBL-0424069-24B

JBL-0424070

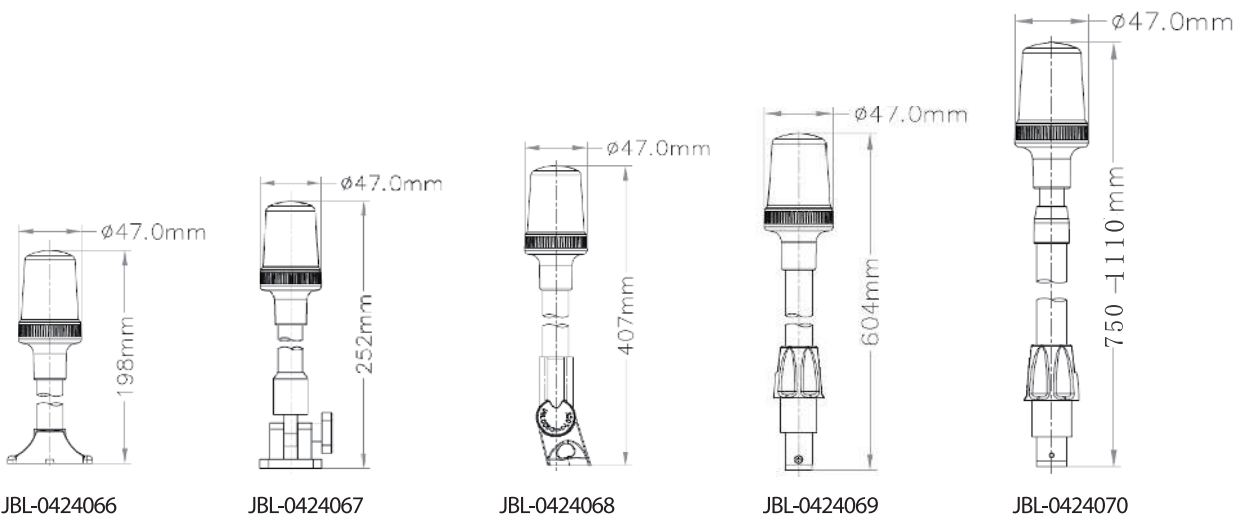

JBL-0424066

JBL-0424067

JBL-0424068

JBL-0424069

JBL-0424070

LED All-round Light 10-30VDC SERIES 60

Model No.	Base Type	Overall Length	
JBL-0424071-5	Fixed mount	6" (152mm)	IP65. Visibility: 2NM Wattage: 1 W. Voltage: 10-30 VDC. Material: Plastic+Stainless Steel pole Angle 360°.
JBL-0424072-9	Adjustable mount	9.5" (247mm)	
JBL-0424072-12A	Adjustable mount	12" (305mm)	
JBL-0424072-25A	Adjustable mount	23.6" (600mm)	
JBL-0424073-15A	Adjustable mount	15" (381mm)	
JBL-0424074-24A	Plug-in mount	22" (557mm)	
JBL-0424074-25	Plug-in mount	27-1/3" 41-1/3 (695-1050mm)	



JBL-0424071-5



JBL-0424072-9



JBL-0424072-12A




JBL-0424073-15A




JBL-0424074-24A




JBL-0424074-25




JBL-0424071-5




JBL-0424072-9




JBL-0424072-12A



JBL-0424072-25A



JBL-0424073-15A



JBL-0424074-24A



JBL-0424074-25

Mounting Base, for Plug-in Mount Pole Lights



Model No.	Base Type	Material
JBL-0424075-SS	Straight base	Stainless Steel and PC
JBL-0424075-S	Straight base	Plastic
JBL-0424075-T	Angled base	Plastic
JBL-0424076-A2	Angled base	Plastic

Portable LED Navigaiton Lights

Battery Operated, No Wires Required



Model No.	Color	Angle	Type	Visibility	
JBL-0424077-RG	Bi-Color bow light	225°	Fixed base	1NM	Waterproof: IP66 For use on Kayak, Inflatable boat, Canoe... *Battery (not included)
JBL-0424077-WH	White	360°	Fixed base	2NM	
JBL-0424077-RGN	Bi-Color bow light	225°	Swivel base	1NM	
JBL-0424077-WHN	White	360°	Swivel base	2NM	
JBL-0424077-RGM	Bi-Color bow light	225°	Magnetic base	1NM	
JBL-0424077-WHM	White	360°	Magnetic base	2NM	
JBL-0424077-BS	Lock Base Only				

Strip Light

LED Strip Light 12VDC

IP:67

Wattage: 3W

Working Voltage: 12 VDC

Mount Type: Surface mount

Housing Material: Aluminum

Housing

Model No.	Color Temperature	Lenght
JBL-0524001	Warm White (2900-3200K)	11-7/8" /300mm



LED Strip Light


IP:67

Wattage: 1W

Working Voltage: 12 VDC

Mount Type: Flush mount

Housing Material: PC

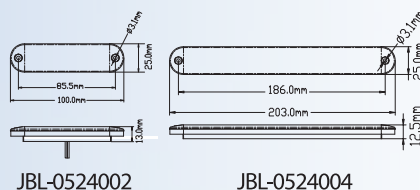

JBL-0524002

JBL-0524004

Model No.	Color Temperature	Lenght
JBL-0524002	White (5500-6300K)	4" / 100mm
JBL-0524003	Blue	4" / 100mm
JBL-0524004	Blue	8" / 203mm
JBL-0524005	White (5500-6300K)	8" / 203mm



LED Strip Light


IP:67

Wattage: 1W

Working Voltage: 12 VDC

Mount Type: Surface mount

Housing Material: PC

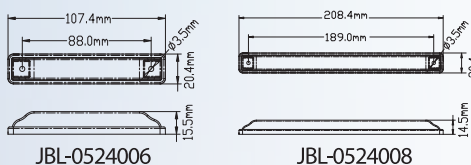

JBL-0524006

JBL-0524008

Model No.	Color Temperature	Lenght
JBL-0524006	White (5500-6300K)	4-1/4 " / 107.4mm
JBL-0524007	Blue	4-1/4 " / 107.4mm
JBL-0524008	Blue	8-1/4 " / 208.4mm
JBL-0524009	White (5500-6300K)	8-1/4 " / 208.4mm



LED Strip Light

IP:67


Wattage:4W

Working Voltage: 12 VDC


Mount Type: Surface mount

Material : Plastic

Switch: ON/OFF

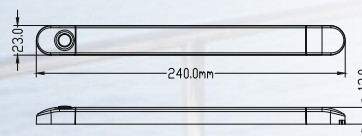


Model No.	Color Temperature	Lenght
JBL-0524010-NWH	White (4000-4500K)	9-3/8 " / 240mm
JBL-0524010-WB	White+Blue	9-3/8 " / 240mm
JBL-0524010-WR	White+Red	9-3/8 " / 240mm
JBL-0524010-NWH1	White(4000-4500K)	9-3/8"/240 mm No Switch

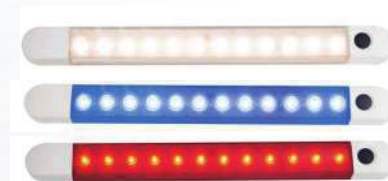

LED Reading Light


Wattage: 3.1W
Working Voltage: 12 VDC
Mount Type: Surface mount



Model No.	Color Temperature	Material
JBL-0624001	Warm White (2900-3200K)	Stainless Steel

LED Reading Light


Wattage: 3.1W
Working Voltage: 12 VDC
Mount Type: Surface mount



Model No.	Color Temperature	Material
JBL-0624002	Warm White (2900-3200K)	Stainless Steel

LED Brass Reading Light


Wattage: 0.5W
Working Voltage: 12 VDC
Mount Type: Surface mount



Model No.	Color Temperature	Material
JBL-0624003	Warm White (2900-3200K)	Brass Lacquered

LED Brass Reading Light

Wattage: 3.1W
Working Voltage: 8-30 VDC
Mount Type: Surface mount



Model No.	LED&Color	Material
JBL-0624004	1x3W/Warm White	Stainless Steel
JBL-0624005	1x3W/Warm White	Brass Lacquered
JBL-0624006	12x0.2W/Warm White	Stainless Steel

LED Reading Light

Wattage: 1W
Working Voltage: 12VDC
Surface finished: Chrome
Mount Type: Surface mount
Material : Aluminum

Model No.	Color Temperature	Type
JBL-0624007	Warm White (2900-3200K)	Swivel joint
JBL-0624008	Warm White (2900-3200K)	Flex



JBL-0624007



JBL-0624008

LED Reading Light

Wattage: 2W
Working Voltage: 12VDC
Surface finished: Satin nickel
Mount Type: Surface mount
Material : Aluminum

Model No.	Color Temperature	Type
JBL-0624009	Warm White (2900-3200K)	Swivel joint
JBL-0624010	Warm White (2900-3200K)	Flex



JBL-0624009



JBL-0624010

LED Reading Light

Wattage: 2W
Working Voltage: 12VDC
Surface finished: Chrome
Mount Type: Surface mount
Material : Aluminum
* For RV use only

Model No.	Color Temperature	Type
JBL-0624011	Warm White (2900-3200K)	Flex



LED Reading Light

Wattage: 1W
Working Voltage: 12VDC
Surface finished: Chrome
Mount Type: Surface mount
Material : Aluminum
* For RV use only


Model No.	Color Temperature	Type
JBL-0624012	Warm White (2900-3200K)	Swivel joint



LED Spot Light 8-30VDC

High quality LEDs for maximum light output and energy efficiency.
 Perfect beams of light to eliminate dark spot.
 Extremely bright.
 Effective Wattage: 27W
 Working Voltage: 10-30 VDC
 Modes: Flash, Fade, SOS, Dimmer
 Rotation: 355° & E 70°
 50M distance RF remote control
 IP Rating: IP65
 Patent No. 2017215246751, 2017305640263


Model No.	Color Temperature	LED
JBL-0724001-B	Cool White (5500-6300K)	12x5W
JBL-0724001-B2	Warm White (2900-3200K)	12x5W



LED Spot Light 8-30VDC


IP Rating: IP65
 Effective Wattage: 21W
 Working Voltage: 10-30 VDC
 Mount Type: Surface mount
 Rotation: 355° & E 70°
 50M distance RF remote control
 High quality LEDs for maximum light output and energy efficiency.
 Perfect beams of light to eliminate dark spot.
 Extremely bright.

Model No.	Color Temperature	LED
JBL-0724002	Cool White (5500-6300K)	9x5W



LED Deck Light 10-30VDC

IP Rating: IP68
 LED Wattage: 18 W
 Effective Wattage: 14W
 Working Voltage: 10-30 VDC
 Mount Type: Bracket mount
 High quality LEDs for maximum light output and energy efficiency.



Model No.	Color Temperature	Material
JBL-0824001	White (5500-6300K)	Aluminum

LED Deck Flood Light 10-30VDC

IP Rating: IP68
 LED Wattage: 40W
 Effective Wattage: 20W
 Working Voltage: 10-30 VDC
 Size: 100mm×100mm
 Aluminum boat work flood light with SS316 bracket.



Model No.	Color Temperature	Material
JBL-0824002	White (5500-6300K)	Aluminum

LED Open-topped Light 10-30VDC

IP Rating: IP67
 LED Wattage: 6 W
 Effective Wattage: 3.3W
 Working Voltage: 10-30 VDC

Model No.	Color Temperature	Material
JBL-0824003	White(6000K)	Aluminum

