



XVALL®

IATF 16949:2016



**TUV
CERT**

IATF 16949:2016

ISO9001

amfori® BSCI



Trade with purpose

Approved

**ECE
R65**

**EMC
R10**

SAE

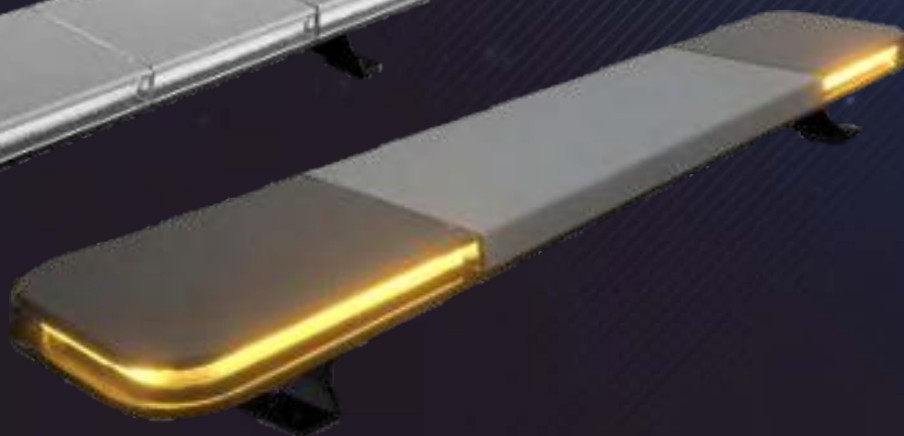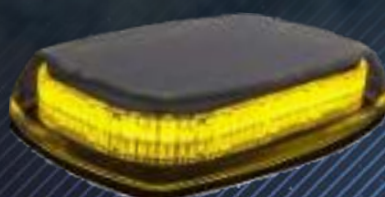

LED WARNING BAR LIGHT

Vehicle Warning & Hazard Products



Foshan Xingyuan Auto Accessories Co.,Ltd

LOW PROFILE LED WARNING BAR LIGHT



3 Single Color Combinations



Amber/Amber

Amber/White

Red/Blue

2 Dual Color Combinations



Amber/White

Red/Blue

EMERGENCY LED Light Bar



16"

NEW



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

LTF-95

► DIMENSIONS

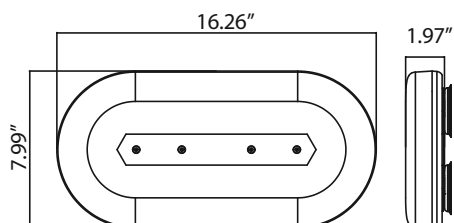

CABLE OUTLET



EMERGENCY LED Light Bar



16"

NEW



LTF-95DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

DUAL COLOR

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V


IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

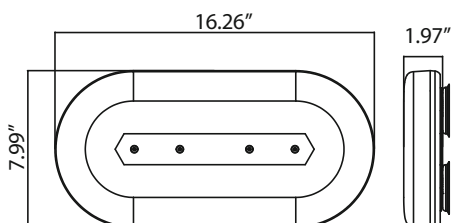

CABLE OUTLET

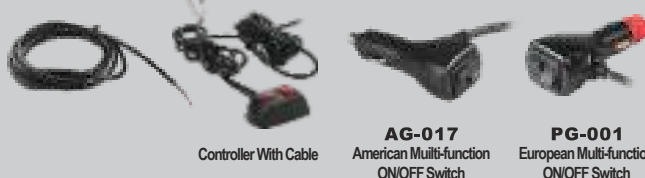

EMERGENCY LED Light Bar



13"

NEW



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V


IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

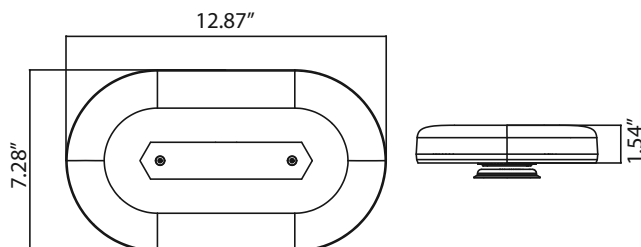

CABLE OUTLET

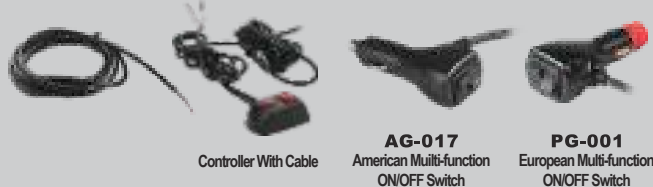

LTF-96



EMERGENCY LED Light Bar



13"

NEW



LTF-96DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

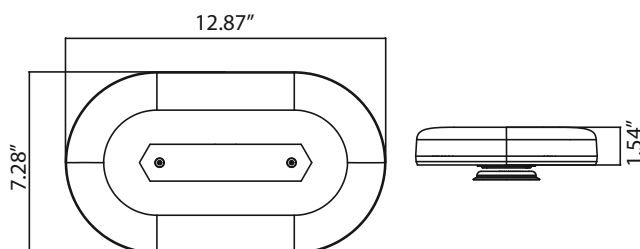

CABLE OUTLET



EMERGENCY LED Light Bar



16"

NEW



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65


Temperature -30 °C ~ +50 °C

LTF-97

► DIMENSIONS

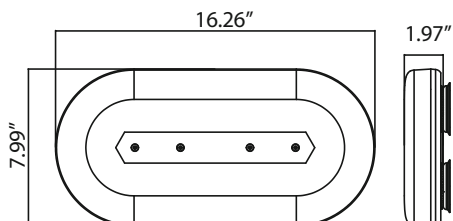

CABLE OUTLET

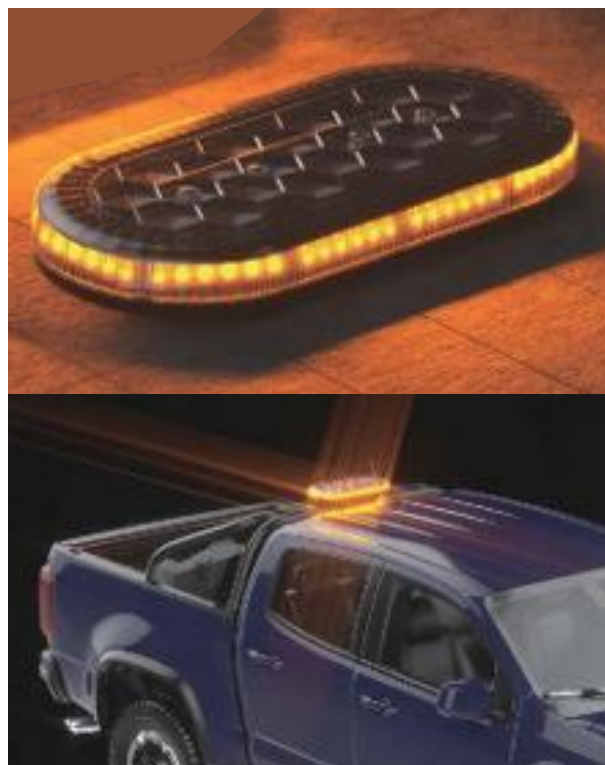

EMERGENCY LED Light Bar



16"

NEW

LTF-97DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

DUAL COLOR

SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C



DIMENSIONS

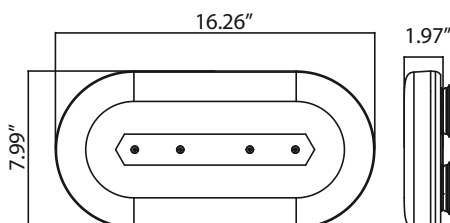

CABLE OUTLET



EMERGENCY LED Light Bar



13"

NEW



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

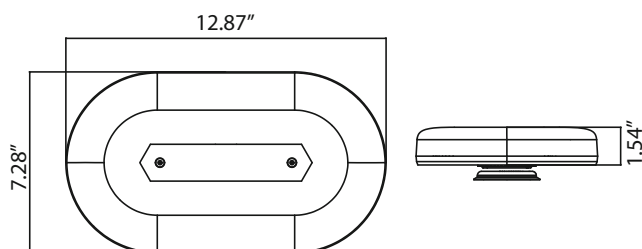

CABLE OUTLET



Controller With Cable

AG-017
American Multi-function
ON/OFF Switch

PG-001
European Multi-function
ON/OFF Switch

LTF-98



EMERGENCY LED Light Bar



13"

NEW



LTF-98DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

DUAL COLOR

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

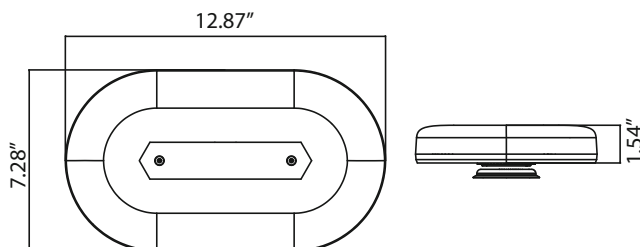

CABLE OUTLET



Controller With Cable

AG-017
American Multi-function
ON/OFF Switch

PG-001
European Multi-function
ON/OFF Switch



EMERGENCY LED Light Bar



NEW

16"



► **MAGNETIC BASE+CIGAR PLUG**



► **BOLT BASE**



► **SCREW BASE**

► SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

LTF-99

► DIMENSIONS

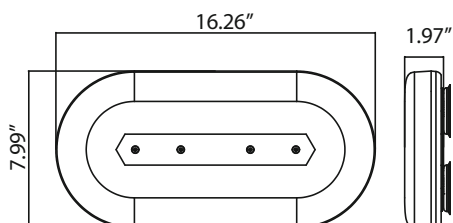

CABLE OUTLET



EMERGENCY LED Light Bar



16"

NEW

LTF-99DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE



► SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65


Temperature -30 °C ~ +50 °C



► DIMENSIONS

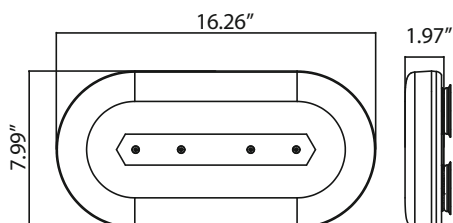

CABLE OUTLET

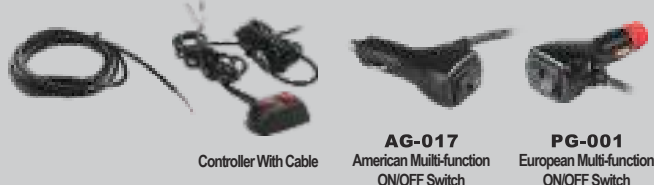

RECHARGEABLE LED LIGHT BAR



RECHARGEABLE

8 LEDx12

NEW

16"



LTF-99WB



Battery Indicator

On/Off Switch

Charging Port



► MAGNETIC BASE



► SPECIFICATIONS

Functions	10 kind of flashing
Input charging voltage	8V~30V
Battery	7.4V 8600mAh
IP Rating	IP65
Temperature	-20 °C — +50 °C
Charging Time	4~5 Hours

► ACCESSORIES



Remote Control



Car Charger




TYPE-C
Charging cable



British plug
charger

► DIMENSIONS

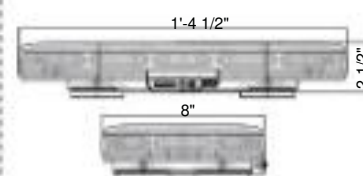

RECHARGEABLE LED LIGHT BAR



RECHARGEABLE

8 LEDx12

NEW

16"



LTF-99DC-WB



Battery Indicator

On/Off Switch

Charging Port



► MAGNETIC BASE

DUAL
COLOR



Amber + Green



► SPECIFICATIONS

Functions	10 kind of flashing
Input charging voltage	8V~30V
Battery	7.4V 8600mAh
IP Rating	IP65
Temperature	-20 °C — +50 °C
Charging Time	4~5 Hours

► ACCESSORIES



Remote Control



Car Charger




TYPE-C
Charging cable



British plug
charger

► DIMENSIONS

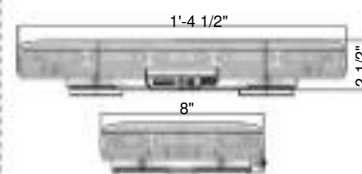

EMERGENCY LED Light Bar



13"

NEW



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

► SPECIFICATIONS


Functions 10 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

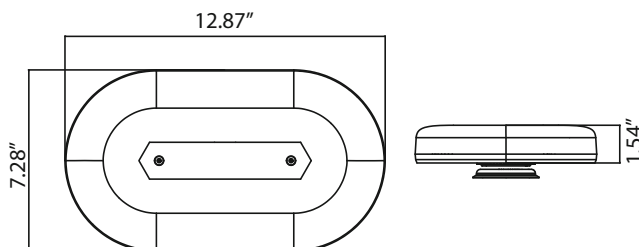

CABLE OUTLET



Controller With Cable

AG-017
American Multi-function
ON/OFF Switch

PG-001
European Multi-function
ON/OFF Switch

LTF-100



EMERGENCY LED Light Bar



13"

NEW



LTF-100DC



► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► SCREW BASE

DUAL COLOR

► SPECIFICATIONS

Functions 10 kind of flashing


Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C



► DIMENSIONS

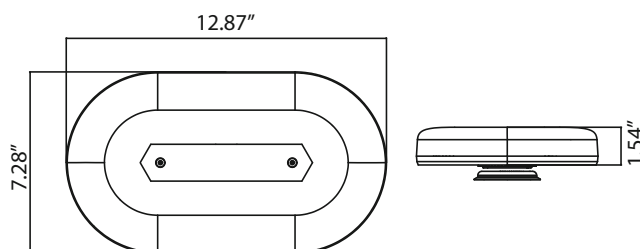

CABLE OUTLET



RECHARGEABLE LED LIGHT BAR



RECHARGEABLE

8 LEDx10

NEW

13"



LTF-100WB



Battery Indicator

On/Off Switch

Charging Port



► MAGNETIC BASE



► SPECIFICATIONS

Functions	10 kind of flashing
Input charging voltage	8V~30V
Battery	7.4V 8600mAh
IP Rating	IP65
Temperature	-20 °C — +50 °C
Charging Time	4~5 Hours

► ACCESSORIES



Remote Control



Car Charger




TYPE-C
Charging cable



British plug
charger

► DIMENSIONS

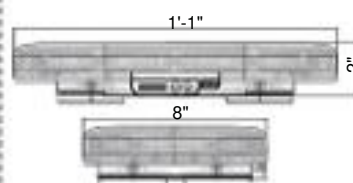

RECHARGEABLE LED LIGHT BAR



RECHARGEABLE

8 LEDx12

NEW

13"



LTF-100DC-WB



Battery Indicator



On/Off Switch



Charging Port



► MAGNETIC BASE

DUAL
COLOR



Amber + Green



► SPECIFICATIONS

Functions	10 kind of flashing
Input charging voltage	8V~30V
Battery	7.4V 8600mAh
IP Rating	IP65
Temperature	-20 °C — +50 °C
Charging Time	4~5 Hours

► ACCESSORIES



Remote Control



Car Charger




TYPE-C
Charging cable



British plug
charger

► DIMENSIONS

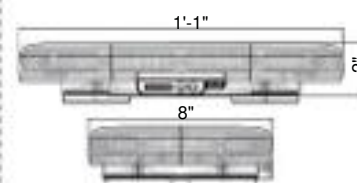

2026
NEW ARRIVAL

LIGHT BAR

Emergency LED Warning Light Bar



Part no. LTF-95



Part no. LTF-95DC



Part no. LTF-95DC

EMERGENCY LED Light Bar



With Corded Controller

**ECE R65
TA2**



Amber Lens



Clear Lens



Smoked Lens

LTF-72R

► SPECIFICATIONS


Functions 15kind of flashing patterns

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

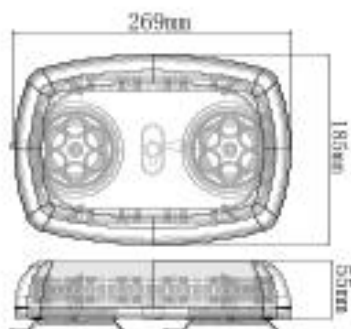

EMERGENCY LED Light Bar



With Corded Controller


**ECE R65
TA2**



► SPECIFICATIONS

Functions	15kind of flashing patterns
Voltage	DC12V~24V
IP Rating	IP65
Temperature	-30 °C ~ +50 °C

► DIMENSIONS

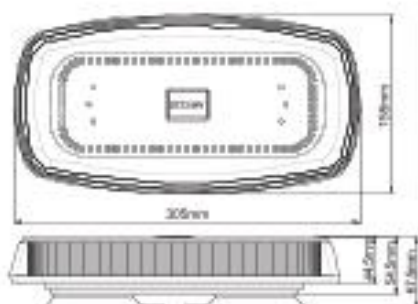

EMERGENCY LED Light Bar



With Corded Controller

**ECE R65
TA2**



► SPECIFICATIONS


Functions 15kind of flashing patterns

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

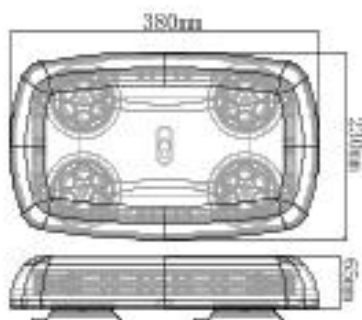

EMERGENCY LED Light Bar



**ECE R65
TA2**



Amber Lens



Clear Lens



Smoked Lens



AG-017
American Multi-function
ON/OFF Switch




PG-001
European Multi-function
ON/OFF Switch

TB-82

► SPECIFICATIONS

Functions	3 kind of flashing
Voltage	DC12V—24V
IP Rating	IP65
Temperature	-30 °C — +50 °C

► DIMENSIONS

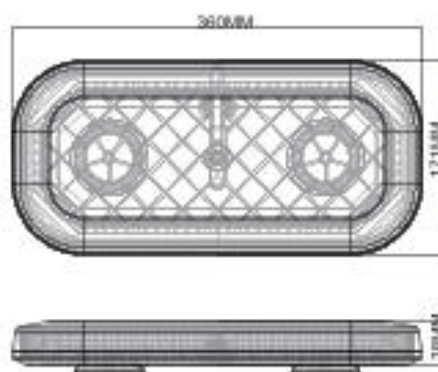

► BASE



EMERGENCY LED Light Bar



**ECE R65
TA2**



Amber Lens



Clear Lens



Smoked Lens



AG-017
American Multi-function
ON/OFF Switch




PG-001
European Multi-function
ON/OFF Switch

TB-81

► SPECIFICATIONS

Functions	3 kind of flashing
Voltage	DC12V—24V
IP Rating	IP65
Temperature	-30 °C — +50 °C

► DIMENSIONS

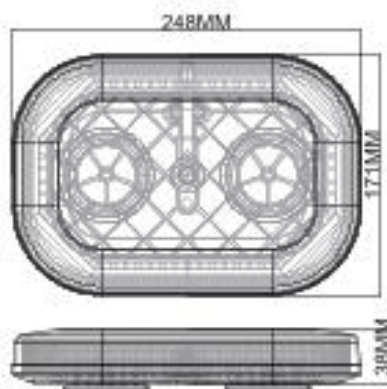

► BASE



EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65

**ECE R65
TA1**



LTF-83A



► SPECIFICATIONS

Functions 3 kind of flashing

Voltage DC12V~24V

Light Source 16x2 LED

IP Rating IP65

Temperature -30 °C ~ +50 °C



AG-017
American Multi-function
ON/OFF Switch




PG-001
European Multi-function
ON/OFF Switch



Magnetic

► DIMENSIONS

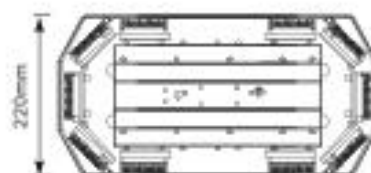

EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65

**ECE R65
TA1**



LTF-83C



► SPECIFICATIONS

Functions	3 kind of flashing
Voltage	DC12V~24V
Light Source	16x2 LED
IP Rating	IP65
Temperature	-30 °C ~ +50 °C




AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch



► DIMENSIONS

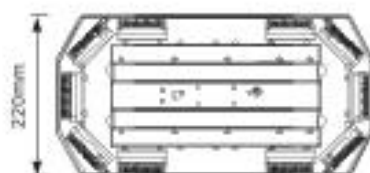

EMERGENCY LED Light Bar With Remote Controller



R65 Approval No.:
E9*65R00/13*11708*00



LTF-66



Amber Lens



Clear Lens



Smoked Lens



Controller With Cable



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

► SPECIFICATIONS



Functions 3 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C

► DIMENSIONS

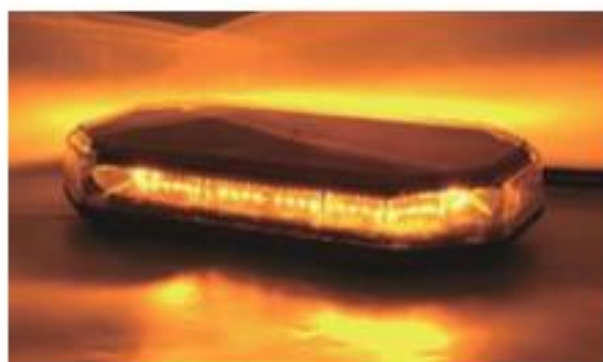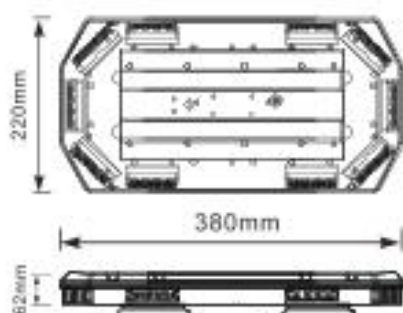

EMERGENCY LED Light Bar



EMCR10
ECE R65 CLASS I



Double Color

	White+Amber		Green+Amber
	Blue+Amber		White+Green

LTF-66DC



AG-017
American Multi-function
ON/OFF Switch




PG-001
European Multi-function
ON/OFF Switch



Magnetic



► DIMENSIONS

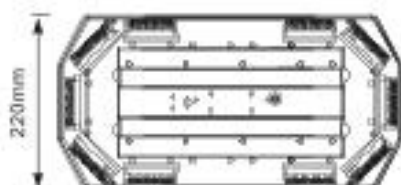

EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65

**ECE R65
TA2**

New Arrival
2024



LTF-74




AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch



► DIMENSIONS

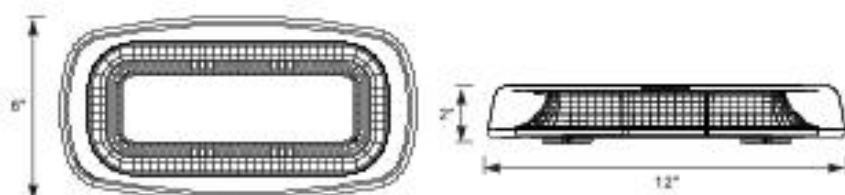

EMERGENCY LED Light Bar With Remote Controller



**ECE R65
TA2**



LTF-74DC

**DUAL
COLOR**



► SPECIFICATIONS

Functions 3 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C



Controller With Cable




AG.017
American Multi-function
ON/OFF Switch



PG.001
European Multi-function
ON/OFF Switch

► DIMENSIONS

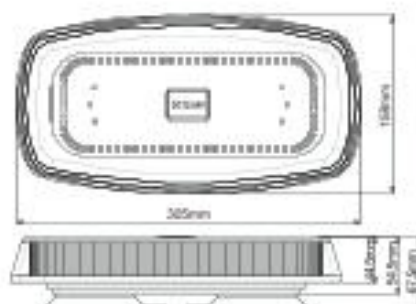

EMERGENCY LED Light Bar With Remote Controller

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65



**ECE R65
TA2**



LTF-74FC

**SINGLE
COLOR**



► SPECIFICATIONS

Functions 3 kind of flashing

Voltage DC12V~24V

IP Rating IP65

Temperature -30 °C ~ +50 °C



Controller With Cable




AG.017
American Multi-function
ON/OFF Switch



PG.001
European Multi-function
ON/OFF Switch

► DIMENSIONS

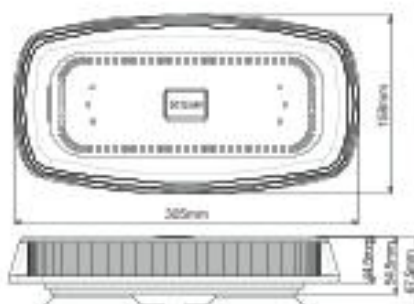

EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65




**ECE R65
TA2**



LTF-72


► DIMENSIONS

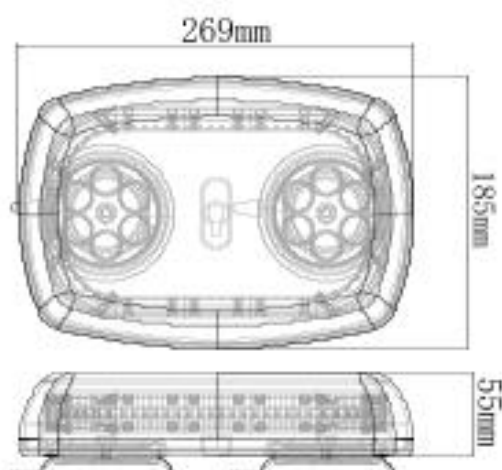

AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

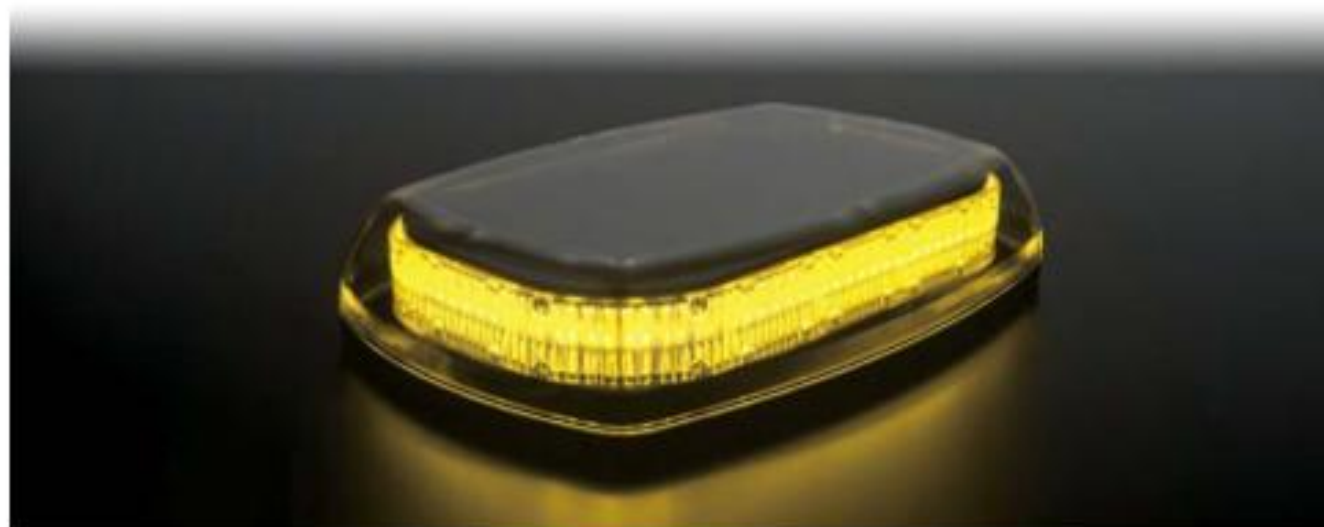

EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65


New Arrival
2024

**ECE R65
TA2**



LTF-73

► DIMENSIONS

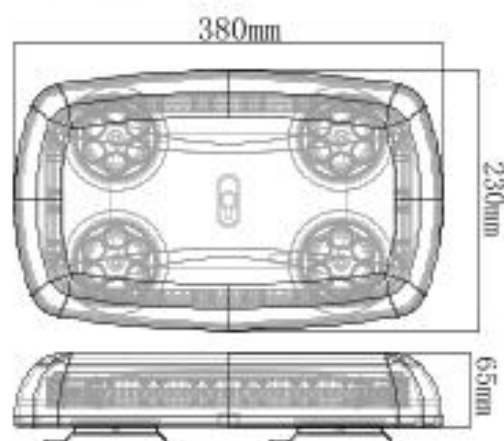

AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch



EMERGENCY LED Light Bar



**ECE R65
TA2**



LTF-78



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch


► MAGNETIC BASE+CIGAR PLUG



► BOLT BASE



► DIMENSIONS

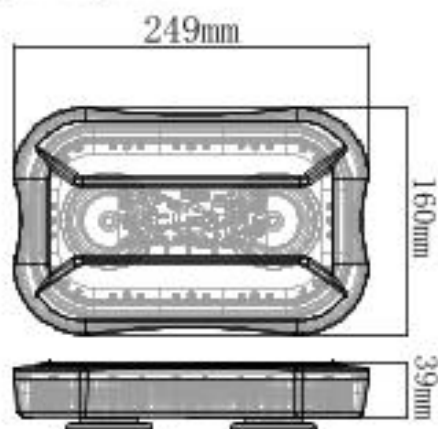

EMERGENCY LED Light Bar

ECE
Reg 65

SAE
class 1

E9

RoHS
Certificate

IP65

New Arrival
2024

**ECE R65
TA2**



LTF-80



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

► MAGNETIC BASE +CIGAR PLUG





► BOLT BASE



► SCREW BASE



► DIMENSIONS

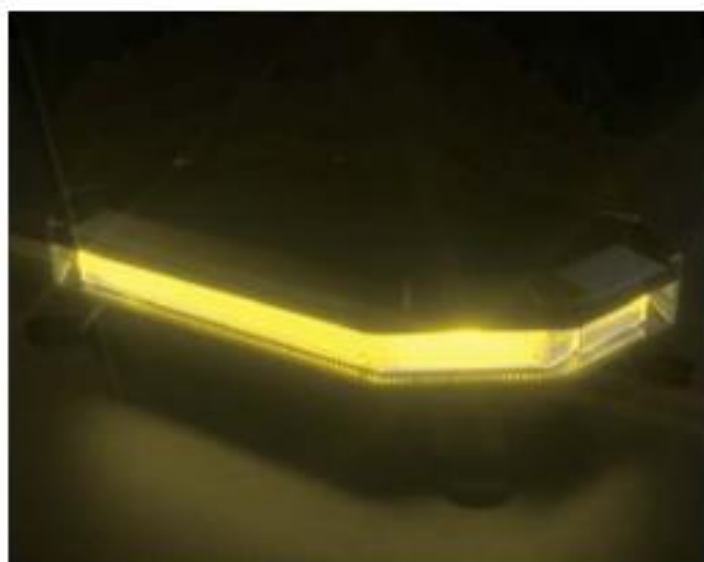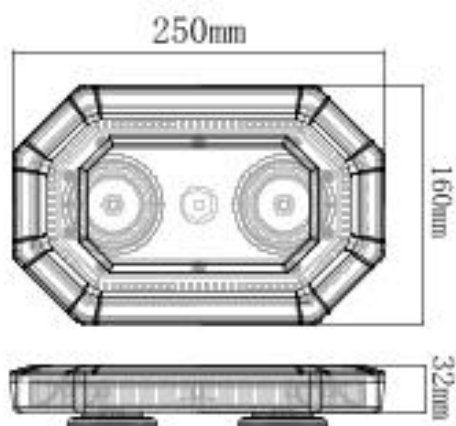


EMERGENCY LED Light Bar



**ECE R65
TA2**



LTF-81




AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

► DIMENSIONS

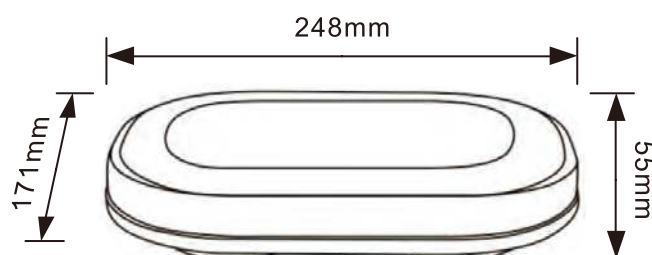

EMERGENCY LED LIGHT BAR


EMERGENCY LED Light Bar



**ECE R65
TA2**



LTF-82



Magnetic




AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

► DIMENSIONS

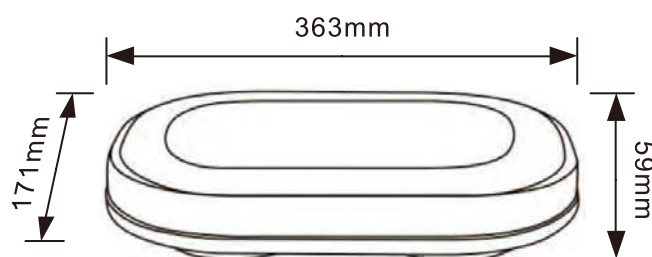

LED light bar

NEW

Technical specification



Input Voltage

DC12-24V



Light Source

High Power LED



Function

36 kind of flashing patterns



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

4 LED x 6

Approval No.:


TA1 (E) 00 6452

(E) 10R 05.11934

MINI



Size

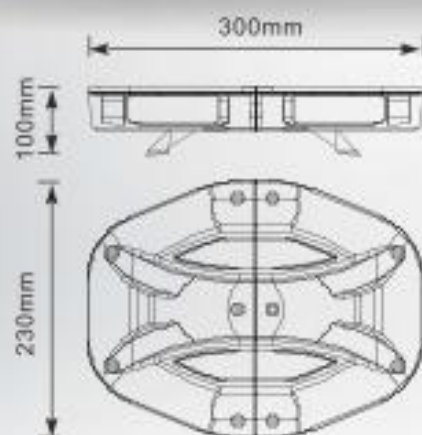

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- Long life-span & Low power consumption

LTI-47LPRO-300mm

EMERGENCY LED LIGHT BAR



2024 New



LED | 8 x 2

Amber Lens Clear Lens



Part no. XYAL-2636-Amber

Mount

Magnetic Base with sucker

12-24V

Amber Lens Colour

Amber Light Colour

Part no. XYAL-2636-Clear

Mount

Magnetic Base with sucker

12-24V


Clear Lens Colour

Amber Light Colour

► SPECIFICATIONS

Functions	8 kind of flashing
Voltage	DC12V~24V
Light Source	16LED
IP Rating	IP65
Temperature	-20 °C ~ +50 °C

► DIMENSIONS

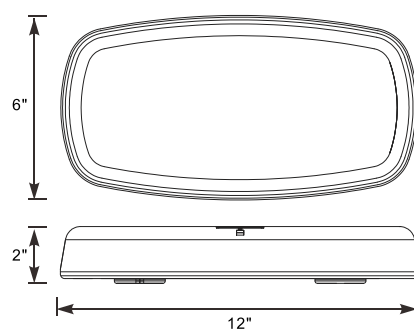

RECHARGEABLE LED LIGHT BAR



2024 New



RECHARGEABLE



LED | 8 x 2

Amber Lens Clear Lens



Part no.

LTF-60HWB Amber

Mount

Magnetic Base with sucker

12-24V

Amber Lens Colour

Amber Light Colour

Part no.

LTF-60HWB Clear

Mount

Magnetic Base with sucker

12-24V

Clear Lens Colour

Amber Light Colour

► SPECIFICATIONS

Functions	8 kind of flashing
Voltage	DC12V~24V
Light Source	16LED
IP Rating	IP65
Temperature	-20 °C ~ +50 °C

► Accessories




240V Mains Plug



12V Car Charger

► DIMENSIONS

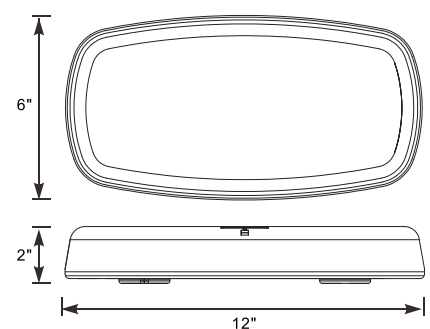

EMERGENCY LED LIGHT BAR




Part no.	XYAL-2637-Amber	Mount	Magnetic Base with sucker
12-24V	Amber Lens Colour	Amber Light Colour	

Part no.	XYAL-2637-Clear	Mount	Magnetic Base with sucker
12-24V	Clear Lens Colour	Amber Light Colour	

► SPECIFICATIONS

Functions	Single Flashing / Dual Flashing /Rotating
Voltage	12V~24V
IP Rating	IP65
Temperature	-20 °C ~ +50 °C

► DIMENSIONS

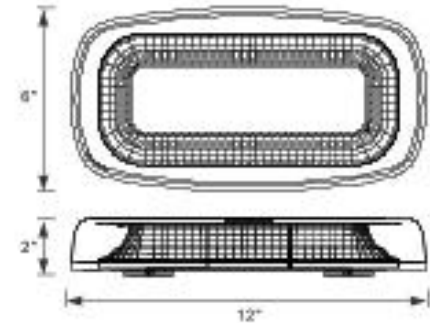

RECHARGEABLE LED LIGHT BAR



2024 New



RECHARGEABLE

LED

Amber Lens Clear Lens



Part no.

LTF-60SWB Amber

Mount

Magnetic Base with sucker

12-24V

Amber Lens Colour

Amber Light Colour

Part no.

LTF-60SWB Clear

Mount

Magnetic Base with sucker

12-24V

Clear Lens Colour

Amber Light Colour

► SPECIFICATIONS

Functions	Single Flashing / Dual Flashing / Rotating
Input charging voltage	9V-30V
Battery	7.4V 6500mAh
IP Rating	IP65
Temperature	-20 °C ~ +50 °C
Charging Time	4-5 Hours

► Accessories




240V Mains Plug



12V Car Charger

► DIMENSIONS

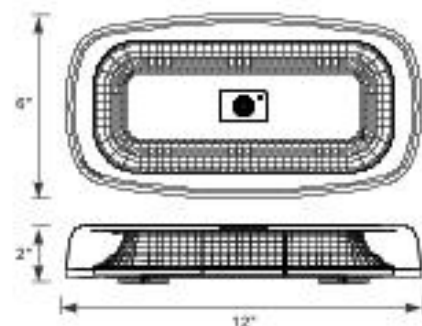

EMERGENCY LED LIGHT BAR




Part no.	LTF-17LR	Mount	Magnetic Base with sucker
12-24V	Clear Lens Colour	White Light Colour	

► SPECIFICATIONS

Functions	Single Flashing / Dual Flashing /Rotating
Voltage	12V~24V
IP Rating	IP65
Temperature	-20 °C ~ +50 °C

► DIMENSIONS

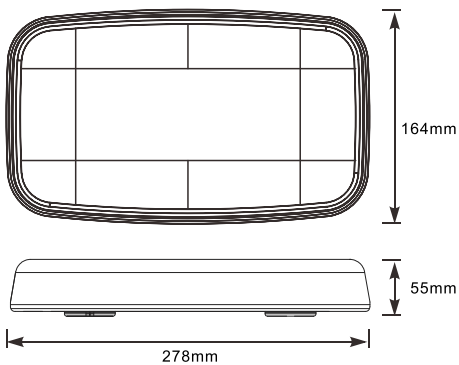

RECHARGEABLE LED LIGHT BAR



Part no.

LTF-17LRWB

Mount

Magnetic Base with sucker

12-24V

Clear Lens Colour

White Light Colour

► SPECIFICATIONS

Functions	Single Flashing / Dual Flashing / Rotating
Input charging voltage	9V-30V
Battery	7.4V 6600mAh
IP Rating	IP65
Temperature	-20 °C ~ +50 °C
Charging Time	4-5 Hours

► Accessories



240V Mains Plug



12V Car Charger

► DIMENSIONS



EMERGENCY LED LIGHT BAR



2024 New

Fully waterproof and vibration resistant, this LED Minibar is the most economical in its class.

4 LEDx4



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch



Part no.

LTF-17LSPRO

Functions

10 kind of flashing

12-24V

Clear Lens Colour

Amber Light Colour

• FEATURES

- ▶ LEDs rated to 100 000 hours of operation
- ▶ High intensity LED modules (24 LED of 1 Watt each)
- ▶ 10 selectable flash patterns
- ▶ Non-volatile memory recalls last flash pattern used at power up
- ▶ Water and vibration resistant
- ▶ Available in permanent and vacuum magnet mount
- ▶ Multiple units can be synchronized
- ▶ Reverse polarity protection
- ▶ Temperature : -20°C~+50°C

• DIMENSIONS



EMERGENCYLED light bar

NEW

Designed to provide superior light output and maximum visibility.

*XL6 Minibar 10 ultra bright LED modules

*Plug/magnetic mounting option

*Permanent Bracket mounting option

Features:

*Super Wide Angle GEN 3 LED Optics

*Built-in 26 Brilliant Selectable Flash Patterns

*Flash Patterns Remotely Selectable With Magnetic Card

*Comes standard with cigarette lighter plug

*Draws only 2.9 Amps max!!

*Multi-Unit Synchronization

*Lens Colour: Amber, Red

*Length: 16.6" (420mm)

*Height: 2.55" (65mm)

*12 Month Warranty

*Also available in RED

Specifications:



*Voltage: 10-30VDC

*Current: Max. 3.5 Amps

*Bulb: 1W GEN 3 x 30pcs

Applications:

Highway/Utility Maintenance, Recovery, Plant & Contracting, Mining, Forestry.

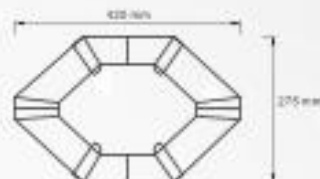

3 LED x 10



Clear color lens

LTF-30LPRO



LED Portable Warning Light

NEW



Waterproof

IP65



Working Temperature

-30 °C — +60 °C



Approvals

ECE R10 R65



LTF-46



LTF-46BRK

Power supply



1. Battery



2. Connect the spring cable

Installation methods



**1. Magnet on the back of itself
LTF-46**



**2. Magnet with bracket
LTF-46BRK**



External power supply input port



High bright LED Two light Flash Alternately
Two mode of power supply:

Powered by 8pcs of AAA battery

Powered by Self- contained battery of vehicles
4pcs of enhanced magnetic pad

EMERGENCYLED light bar

NEW

Technical specification:



Input Voltage
DC12-24V



Light Source
3W High Power LED



Lens Material
PC



Waterproof
IP67



Working Temperature
-30 °C — +60 °C



Approvals
ECE R10 R65

24 LED

LED

ECE
Reg 65

R10

- Light Source Upgraded
- More bright
- More long life-span



Features

Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 60mm
Length: 440mm
Width: 215mm



LTF-29LPRO

EMERGENCY LED light bar

NEW

Technical specification



Input Voltage

DC12-24V



Light Source

High Power LED



Function

8kind of flashing patterns



Lens Material

PC



Base Material

ABS




Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

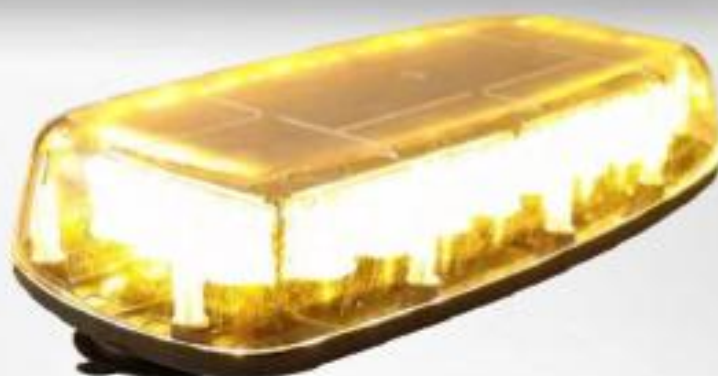

LTF-23LPRO

2 LED x 10

R10 Approval No.:

E9 10R 03 11934




Description

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8kind of flashing flashing patterns

- 3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- ECE R10/ECE R65/SAE
- Long life-span & Low power consumption

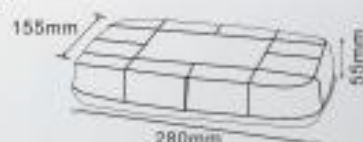

EMERGENCY LED light bar

NEW

Technical specification



Input Voltage

DC12-24V



Light Source

High Power LED



Function

8kind of flashing patterns



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C


MINI

LED

RoHS
Certificate

12-24V

32 LED

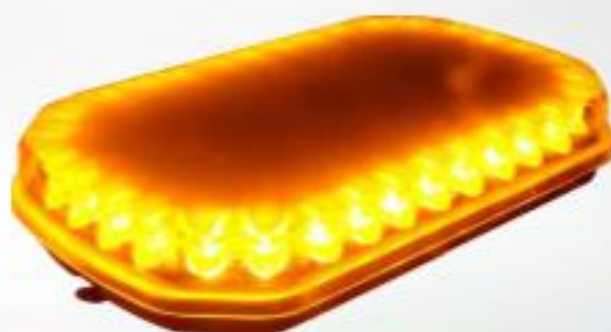

LTF-56L

Size



- 3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- ECE R10/ECE R65/SAE
- Long life-span & Low power consumption

EMERGENCY LED light bar

NEW

LTF-17LPRO

R65 Approval No.:
TA1 E9 00 6788

LED

ECE
Reg 65

R10

SAE

2 LED x 12



Rubber suction cap
protects paintwork



Off/On&Flash pattern
selector switch



Description

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- ECE R65/ECE R10/SAE
- Long life-span & Low power consumption

Model	Lens Color	Voltage	Flash Patterns	Base Type	Approvals
LTF-17LPRO	Amber Clear	12-24V	8 kind of flashing patterns	Magnetic base/ Cigar Plug	ECE R10 ECE R65 Class1



EMERGENCY LED light bar

NEW

LTF-18LPRO

1 LED x 14

LED

ECE
Reg 65

R10

SAE



Rubber suction cap protects paintwork



Off/On the power supply switch the function of warning light



Socket and power switch



with pole



Technical specification:

- High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC lens, good performance in transmittance, Anti ultraviolet.
- R65/R10/SAE
- Long life-span & Low power consumption

Model	Lens Color	Voltage	Flash Patterns	Base Type	Approvals
LTF-18LPRO	Amber Clear	12-24V	Rotating/ Dual Flashing/ Sextuple Flashing	Magnetic base/ Cigar Plug/ With pole	ECE R10 ECE R65 Class1



EMERGENCY LED light bar

NEW

LTF-19LPRO

2 LED x 10

LED

ECE
Reg 65

R10

SAE



Rubber suction cap
protects paintwork



Off/On&Flash pattern
selector switch



Description

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing flashing patterns

- 3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- ECE R10/ECE R65/SAE
- Long life-span & Low power consumption

Model	Lens Color	Voltage	Flash Patterns	Base Type	Approvals
LTF-19LPRO	Amber Clear	12-24V	8kind of flashing patterns	Magnetic base/ Cigar Plug	ECE R10 ECE R65 Class1



EMERGENCY LED light bar

NEW

LTF-42LPRO

3 LED x 12

LED ECE Reg 65 R10 SAE

R65 Approval No.:
E9 65R00/10.6109 00



with magenet base

with bracket type

with single bolt base

Technical specification:

- High power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- R65/R10/SAE
- Long life-span&Low power consumption

The original Bar. This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bar, with the ease of use and value of a beacon.

Available in rotator or double flash

Model	Lens Color	Voltage	Flash Patterns	Base Type	Approvals
LTF-42LPRO	Amber Clear	12-24V	10kind of flashing patterns	Magnetic base/ Cigar Plug	ECE R10 ECE R65 Class1



EMERGENCY LED light bar

NEW

LTF-43LPRO

2 LED x 10

R65 Approval No.:
E9 65R00/10.6109 00

LED

ECE
Reg 65

R10

SAE



with magnet base

with bracket type


with single bolt base

Technical specification:


The original Bar. This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bar, with the ease of use and value of a beacon.

Available in rotator or double flash

Model	Lens Color	Voltage	Flash Patterns	Base Type	Approvals
LTF-43LPRO	Amber Clear	12-24V	10 kind of flashing patterns	Magnetic base/ Cigar Plug	ECE R10 ECE R65 Class1



EMERGENCY LED LIGHT BAR

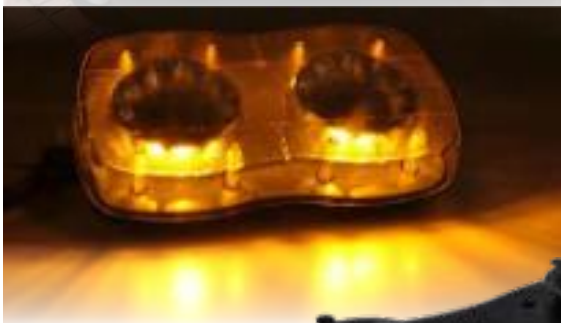

Part no.

LTF-19H Clear

Mount

Magnetic Base with sucker

12-24V

Clear Lens Colour

Amber Light Colour

Part no.

LTF-19H Amber

Mount

Magnetic Base with sucker

12-24V


Amber Lens Colour

Amber Light Colour

► SPECIFICATIONS

Functions	Single Flashing / Dual Flashing /Rotating
Voltage	12V~24V
IP Rating	IP65
Temperature	-20 °C ~ +50 °C

► DIMENSIONS

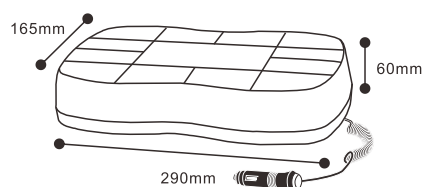

EMERGENCY LED light bar

NEW



Product features

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars ,with the easy way of use and value of a beacon. Available in flashing flashing patterns

- High power LED, encapsuled, ensure the perfect lumen output and perfect beam pattern
- Aluminium reflector ,guarantee the perfect beam pattern and , Aluminium radiator , fast Heat-diffusion , protect the electronic component inside
- DOT certificate approval , and E-Mark Certificate
- Long life-span & Low power consumption

Approval No.:

 *65R00/11*11061*00

KYAL-2135

Specification

Voltage: DC12-24V
Light Source: 0.5W High Power SMD LED ,45*2PCS
Max Current: 3.2A @12V 1.6A@24V
Function: Rotating & Flashing
Lens Material: PC
Base Material: ABS
Base Type: Magnetic Base/ Bolt Base
Waterproof: IP65



EMERGENCYLED light bar

NEW

Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon.

Available in rotating or double flashing

Light bar with LED light source is the tendency

- SMD light source-120degree beam angel
- Aluminum radiator, good performance in heat radiation,protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption

XYAL-2173


2 LED x 10

R10 Approval No.:

E9 10R 03 11934

Specification

Voltage range	12/24V Multivolt
Model number	3W High Power LED
Function	Rotating&Flashing
Lens material	PC
Base material	ABS
Approval	EMC R10
Ingress protection	IP65

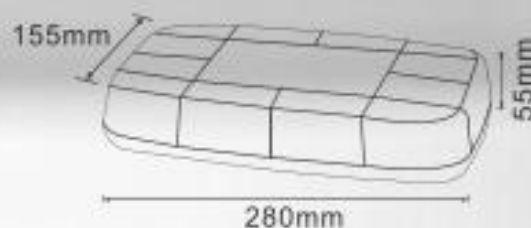

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

LTF-26H **8LED x 2**



Specification

Flash rate nominal 70

12 volt 24 volt (not dual voltage)

Current Consumption:

12Volt=1.4Amp

24Volt=0.7 Amp

Features


Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 158mm

Length: 415mm

Width: 203mm

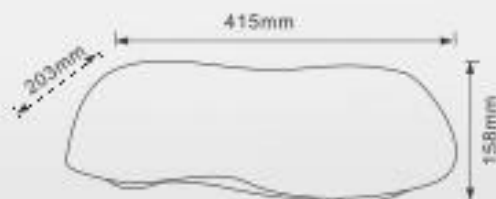

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

XYAL-2134

24 LED x 2

Specification

Flash rate nominal 70

12 volt 24 volt (not dual voltage)

Current Consumption:

12Volt=4.0Amp

24Volt=2.0 Amp

Features


Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 158mm

Length: 415mm

Width: 203mm

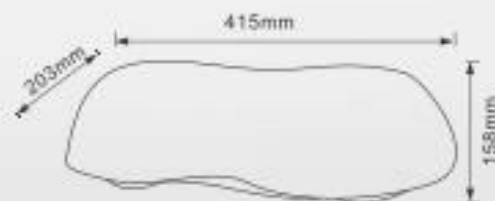

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type



HALOGEN

LTF-26A

Specification

Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Wide variety of colour options
Bulbs fitted

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm



LED

LTF-26B-LED

Specification

Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Wide variety of colour options
Bulbs fitted

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm



HALOGEN

LTF-26C

Specification

Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Wide variety of colour options
Bulbs fitted

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm



XENON

LTF-26D-XENON

Specification

Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Wide variety of colour options
Bulbs fitted

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm



XENON

LTF-26E-XENON

Specification

Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Wide variety of colour options
Bulbs fitted

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm



LED

LTF-26F-LED

Specification


Flash rate nominal: 180
12 volt 24 volt (rot flash voltage)
Current Consumption:
12Volt=1.5Amp
24Volt=3.5Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin rotator with flat mirror
Dual level stainless magnetic base
LED single flash strobe

Dimensions

Height: 158mm
Length: 415mm
Width: 203mm

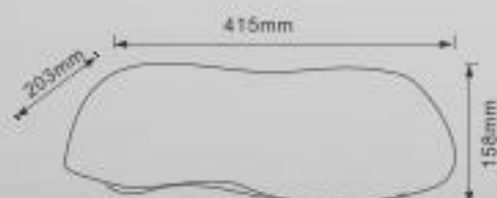

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.
Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

LTF-26N

24 LED x 2



Specification

Flash rate nominal 70
12 volt 24 volt (not dual voltage)
Current Consumption:
12Volt=1.4Amp
24Volt=0.7 Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 120mm
Length: 390mm
Width: 183mm



LED

ECE
Reg 63

R10



EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

XYAL-2495-8LED 8 LED x 2



Specification

Flash rate nominal 70

12 volt 24 volt (not dual voltage)

Current Consumption:

12Volt=1.4Amp

24Volt=0.7 Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 120mm

Length: 390mm

Width: 183mm



EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

XYAL-2495-12LED **12 LED x 2**



Specification

Flash rate nominal 70

12 volt 24 volt (not dual voltage)

Current Consumption:

12Volt=1.4Amp

24Volt=0.7 Amp

Features

Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 120mm

Length: 390mm

Width: 183mm



R65 Approval No.:
E9*65R00/13*11709*00



EMERGENCYLED light bar

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.
Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

LTF-26N-4 **45 LED x 2**



Features


Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 120mm

Length: 390mm

Width: 183mm

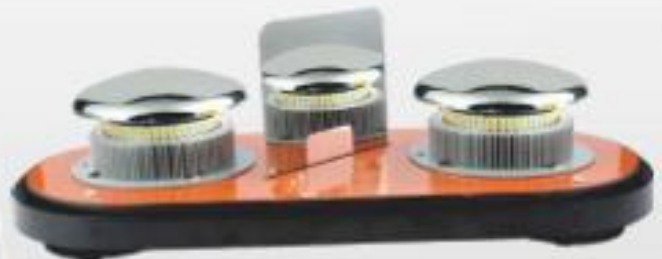

EMERGENCY LED light bar

NEW



Product features

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars ,with the easy way of use and value of a beacon. Available in flashing flashing patterns


- The original Bar
- High power LED, encapsuled, ensure the perfect lumen output and perfect beam pattern
- Aluminium reflector ,guarantee the perfect beam pattern and , Aluminium radiator , fast Heat-diffusion , protect the electronic component inside
- DOT certificate approval , and E-Mark Certificate
- Long life-span & Low power consumption

LTF-77



Specification

Function	Rotating or Flashing
Voltage	12-24 VDC
Max Current	1.6A @12V 0.8A@24V
Base Type	Magnetic Base/ Bolt Base
Waterproof	Ip65
Light Source	High power LED
Lens Material	PC
Base Material	ABS
Color Matching	RED&BLUE/RED&RED/ BLUE&BLUE/AMBER&AMBER

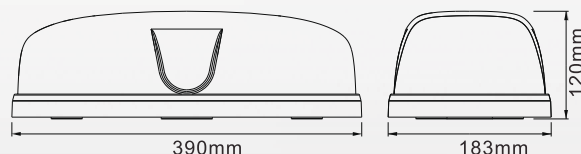

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

XYAL-2133

45 LED x 2



Features


Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 60mm

Length: 440mm

Width: 215mm

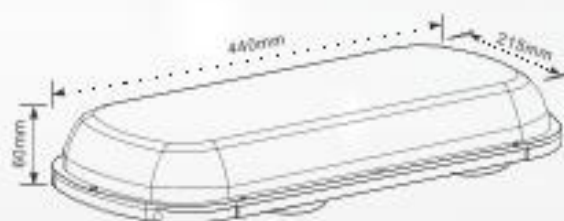

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.

Available in rotator or double flash Xenon Strobe and High power LED Type

•Light Source Upgraded •More bright•More long life-span

LTF-29

4 LED x 8

Features


Aerodynamically designed polycarbonate lens and body
Twin strobes with flat mirror
Dual pivot suction magnetic base
LED single flash strobe

Dimensions

Height: 60mm

Length: 440mm

Width: 215mm

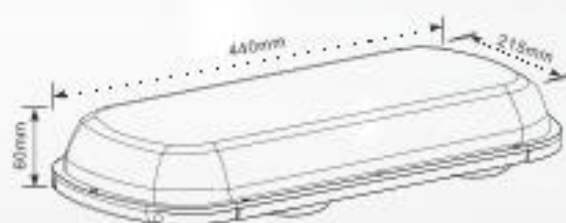

EMERGENCYLED light bar

NEW

Designed to provide superior light output and maximum visibility.

*XL6 Minibar 10 ultra bright LED modules

*Plug/magnetic mounting option

*Permanent Bracket mounting option

Features:

*Super Wide Angle GEN 3 LED Optics

*Built-in 26 Brilliant Selectable Flash Patterns

*Flash Patterns Remotely Selectable With Magnetic Card

*Comes standard with cigarette lighter plug

*Draws only 2.9 Amps max!!

*Multi-Unit Synchronization

*Lens Colour: Amber, Red

*Length: 16.6" (420mm)

*Height: 2.55" (65mm)

*12 Month Warranty

*Also available in RED

Specifications:

*Voltage: 10-30VDC

*Current: Max. 3.5 Amps

*Bulb: 1W GEN 3 x 30pcs

Applications:

Highway/Utility Maintenance, Recovery, Plant & Contracting, Mining, Forestry.



3 LED x 10





XYAL-2174-Amber

Amber color lens

XYAL-2174-Clear

Clear color lens



socket and multi-function



On/Off Switch
on LED indicator

Flash Pattern Switch
Momentarily push switch

EMERGENCYLED light bar

NEW

Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing flashing patterns

- 3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- DOT certificate approved
- Long life-span & Low power consumption

LED

ECE
Reg 65

R10

LTF-17L

2 LED x 10



Specification

Voltage: DC 12-24V
Light Source: 3W High power LEDs
Lens Material: PC
Lens Color: Amber or Clear
Base Type: Magnetic base/Cigar Plug
Operating Temp: -30°C - 50°C
Function: 8 kind of flashing patterns
Waterproof: IP65



EMERGENCYLED light bar

NEW

12/24 Volt Aeromax Mini L.E.D Light Box (CLEAR) Magnetic Base with Amber Lens

LED

ECE
Reg 65

R10

LTF-17LS CLEAR LENS


4 LED x 4



with single bolt base



with bracket type



Off/On & Flash pattern
selector switch



Rubber suction cap
protects paintwork



with magenet base



Double Color LED light bar

NEW

Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- DOT certificate approved
- Long life-span & Low power consumption

LED

ECE
Reg 65

R10

LTF-17L-DC

4 LED x 6

Specification

Voltage: DC12-24V
Light Source: 3W High power LEDs
Lens Material: PC
Lens Color: Clear
Base Type: Magnetic base/Cigar Plug
Operating Temp: -30°C-50°C
Function: 10 kind of flashing patterns
Waterproof: IP65



EMERGENCY LED light bar

NEW

4 LED x 6

LED

ECE
Reg 65

R10




LTF-17N

Specification

Charging voltage	DC12-24V
Light Source	3W LED
Function	8 Functions
Housing Material	PC
Lens Color	Clear
Waterproof level	IP65
Operation temperature	-20°C ~ 50°C

Size



EMERGENCY LED light bar

NEW

Technical specification

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon.

Available in rotating or double flashing

Light bar with LED light source is the tendency



LTF-18LS

Approval No.:

E9*10R*05/01*16099*00

45 LED



Specification

Voltage: DC12-24V

Light Source: 0.5W High Power SMD LED ,45PCS

Max Current: 1.6A @12V 0.8A@24V

Function: Rotating & Flashing

Lens Material: PC


Lens Color: Amber or Transparent

Base Material: ABS

Base Type: Magnetic Base/ Bolt Base

Waterproof: IP65

- SMD light source-120degree beam angel
- Aluminum radiator, good performance in heat radiation,protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption

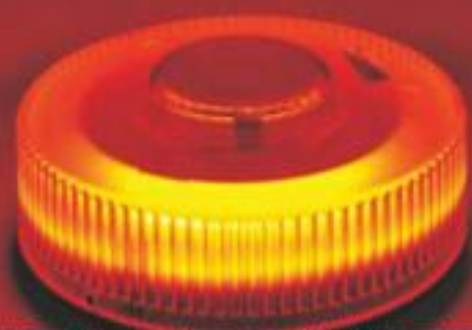

EMERGENCY LED light bar

NEW

Technical specification

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon.

Available in rotating or double flashing

Light bar with LED light source is the tendency



LTF-18H-2

Approval No.:

E9*10R*05/01*16099*00

16 LED



Specification

Voltage: DC12-24V

Light Source: 0.5W High Power SMD LED, 16PCS

Max Current: 1.6A @12V 0.8A@24V

Function: Rotating & Flashing

Lens Material: PC

Lens Color: Amber or Transparent

Base Material: ABS

Base Type: Magnetic Base/ Bolt Base

Waterproof: IP65

- SMD light source-120degree beam angel
- Aluminum radiator, good performance in heat radiation, protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption



EMERGENCY LED light bar

NEW

Technical specification

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon.

Available in rotating or double flashing

Light bar with LED light source is the tendency




LTF-18H-3

Approval No.:

E9*10R*05/01*16099*00

16 LED

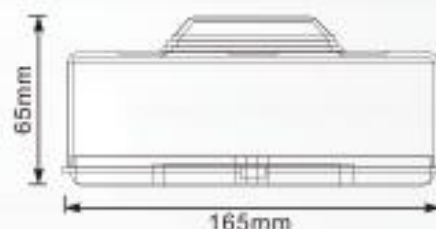

Specification

Voltage: DC12-24V

Light Source: 0.5W High Power SMD LED, 16PCS

Max Current: 1.6A @12V 0.8A @24V

Function: Rotating & Flashing

Lens Material: PC

Lens Color: Amber or Transparent

Base Material: ABS

Base Type: Magnetic Base/ Bolt Base

Waterproof: IP65

- SMD light source-120degree beam angel
- Aluminum radiator, good performance in heat radiation, protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption



Rechargeable LED light bar

NEW



2 LED x 10

LTF-19LWB

LED

ECE
Reg 66

R10



Charging Port



On/Off Switch



12V Car Charger



Size

Specification

Charging voltage	DC5V
Light Source	3W LED
Function	10 Functions
Housing Material	PC
Lens Color	Amber
Battery capacity	7.4V/6600mAh
Charging time	4-5 hours
Waterproof level	IP65
Operation temperature	-20°C ~ 50°C



Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- Long life-span & Low power consumption

Bright LED Lamps

LED lamps use NEW designed wide angle optic lenses along with LED collimators to produce the brightest, highest efficiency light beams the industry has ever seen.

Available Options

Lightbars can be configured with optional Takedown, Alley lights, Work lights and Stop-Turn-Tail lights.

Lamp Configurations and Available Colors

Clear lenses are standard, colored lenses can be ordered on single color LED modules. Multi-colored LED lamp modules must use clear lenses.

Warranty Information

Two year warranty on LED controllers and LED lamp modules.

Rechargeable LED light bar

NEW



LED

ECE
Reg 65

R10



Battery Indicator



Charging Port

On/Off Switch

Approval No.: TA1 E9 00 6484

2 LED x 10

LTF-17LWB

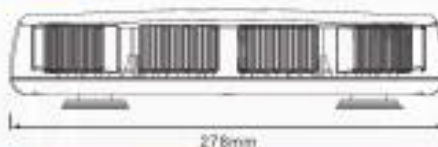

Specification

Charging voltage	DC12-24V
Light Source	3W LED
Function	3 Functions
Housing Material	PC
Lens Color	Clear
Battery capacity	7.4V/6600mAh
Charging time	4-5 hours
Waterproof level	IP65
Operation temperature	-20°C ~ 50°C



Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 3 kind of flashing flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- Long life-span & Low power consumption

Bright LED Lamps

LED lamps use NEW designed wide angle optic lenses along with LED collimators to produce the brightest, highest efficiency light beams the industry has ever seen.

Available Options

Lightbars can be configured with optional Takedown, Alley lights, Work lights and Stop - Turn - Tail lights.

Lamp Configurations and Available Colors

Clear lenses are standard, colored lenses can be ordered on single color LED modules. Multi-colored LED lamp modules must use clear lenses.

Warranty Information

Two year warranty on LED controllers and LED lamp modules.

Rechargeable LED light bar

NEW



LED

ECE
Reg E3

R10



Battery indicator



Charging Port





On/Off Switch

Approval No.: TA1 E9 00 6484

LTF-17LWB(Amber)

2 LED x 10

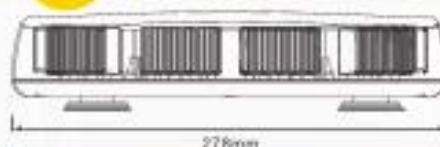

Specification

Charging voltage	DC12-24V
Light Source	3W LED
Function	3 Functions
Housing Material	PC
Lens Color	Amber
Battery capacity	7.4V/6600mAh
Charging time	4-5 hours
Waterproof level	IP65
Operation temperature	-20°C ~ 50°C



Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 3 kind of flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- Long life-span & Low power consumption

Bright LED Lamps

LED lamps use NEW designed wide angle optic lenses along with LED collimators to produce the brightest, highest efficiency light beams the industry has ever seen.

Available Options

Lightbars can be configured with optional Takedown, Alley lights, Work lights and Stop - Turn - Tail lights.

Lamp Configurations and Available Colors

Clear lenses are standard, colored lenses can be ordered on single color LED modules. Multi-colored LED lamp modules must use clear lenses.

Warranty Information

Two year warranty on LED controllers and LED lamp modules.

Rechargeable LED light bar

NEW




LTF-47LWB-300mm



Approval No.:

TA1 (E) 00 6452

(E) 10R 05.11934



4 LED x 6

MINI



240V Mains Plug



12V Car Charger

Part no. RO-WL-009



Technical specification:

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the ease of use and value of a beacon. Available in 8 kind of flashing patterns

- 3W High power LED, encapsulated by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- Long life-span & Low power consumption

Bright LED Lamps!

LED lamps use NEW designed wide angle optic lenses along with LED collimators to produce the brightest, highest efficiency light beams the industry has ever seen.

Available Options

Lightbars can be configured with optional Takedown, Alley lights, Work lights and Stop-Turn-Tail lights.

Lamp Configurations and Available Colors

Clear lenses are standard, colored lenses can be ordered on single color LED modules. Multi-colored LED lamp modules must use clear lenses.

Warranty Information

Two year warranty on LED controllers and LED lamp modules.

Super-thin mini LED light bar

NEW



Product features

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars, with the easy way of use and value of a beacon. Available in flashing flashing patterns

- High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span & Low power consumption

XYAL-2161

Transparent lens



Amber lens



ECE R65

SAE

3 LED x 12

R65 Approval No.:
E9*65R00/10.6109*00



with bracket type



with magnet base



with single bolt base

Specification

Voltage : DC12-24V

Light Source: 3W High Power LED, 36PCS

Function: Rotating & Flashing,
including various kind of flashing mode

Lens Material: PC

Base Material: ABS

Base Type: Magnetic Base/ Bolt Base

Waterproof: IP65



Rubber suction cap
protects paintwork



On/Off & Flash pattern
selector switch



EMERGENCY LED light bar

NEW

Product features

The original Bar

This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars ,with the easy way of use and value of a beacon. Available in flashing flashing patterns

- High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- DOT certificate approval , and E-Mark Certificate
- Long life-span & Low power consumption

XYAL-2162

Transparent lens



Amber lens



ECE R65

SAE

3 LED x 10

R65 Approval No.:
E9*65R00/10.6109*00

Specification

Voltage: DC12-24V

Light Source: 3W High Power LED ,30PCS

Function: Rotating & Flashing,

Including various kind of flashing mode

Lens Material: PC

Base Material: ABS

Base Type: Magnetic Base/ Bolt Base

Waterproof: IP65




with bracket type



with magenet base



with single bolt base



3

Single Color
Combinations



Amber/Amber

Amber/White

Red/Blue

2

Dual Color
Combinations



Amber/White

Red/Blue

EMERGENCY LED light bar

NEW

Technical specification:

The original Bar. This compact unit bridges the gap between beacon and lightbars, offering the visibility and performance of a lightbar, with the ease of use and value of a beacon.
Available in rotator or double flash Xenon Strobe and High power LED Type

Specification

- SMD light source - 120 degree beam angle
- Aluminum radiator, good performance in heat radiation, protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption



Voltage: DC12-24V

Lens Material: PC

Lens Color: Amber or Clear

Base Type: Magnetic base / Cigar Plug

Operating Temp: -30~50 °C

Waterproof: IP65



Mounting Screws



Cut to Hardwired to Switch



Gasket for Permanent Mount



Heavy Duty Cigarette Lighter Adapter



LTF-31L

4 LED x 6



4 LED x 10



EMERGENCY LED LIGHT BAR



Part no.

LTF-29COB-1

Mount

Magnetic Base with sucker

10-30V

Clear Lens Colour

White Light Colour

► SPECIFICATIONS

Functions	9 Functions
Input charging voltage	10V ~ 30V
Power	30W
LED Type	High Power COB LED
IP Rating	IP65
Temperature	-30 °C ~ +70 °C

► Accessories



► DIMENSIONS



EMERGENCY LED LIGHT BAR



2024 New

LED

High Power COB



Part no.

LTF-29COB-2

Mount

Magnetic Base with sucker

10-30V

Clear Lens Colour

White Light Colour

► SPECIFICATIONS

Functions	9 Functions
Input charging voltage	10V ~ 30V
Power	30W
LED Type	High Power COB LED
IP Rating	IP65
Temperature	-30 °C ~ +70 °C

► Accessories



► DIMENSIONS



20 YEARS
2003-2023



I A T F 1 6 9 4 9 : 2 0 1 6

※ The parameters of each items in this catalog is just for your reference.
※ There may be a little differences on parameters for each times base on different requirement of customers.